



DMP 331 i DMP 333 i LMP 331 i

**Precision
Pressure Transmitter /
Screw-in transmitter**

Stainless Steel Sensor

**accuracy
according to IEC 60770:
0.1 % FSO**

DMP 331i DMP 333i LMP 331i

Nominal pressure

from 0 ... 400 mbar
up to 0 ... 600 bar

Output signal

2-wire: 4 ... 20 mA
3-wire: 0 ... 10 V
others on request

Product characteristics

- ▶ thermal error in compensated range
-20 ... 80 °C: 0.2 % FSO
TC 0.02 % FSO / 10K
- ▶ communication interface for
adjusting of offset, span and
damping

Optional versions

- ▶ IS-versions
- ▶ Ex ia = intrinsically safe for
gases and dusts
- ▶ adjustment of nominal pressure
gauges (factory-provided)



The precision pressure transmitter DMP 331i and DMP 333i also the precision screw-in transmitter LMP 331i demonstrate the further development of our industrial pressure transmitters.

The signal processing of sensor signal is done by digital electronics with 16-bit analog digital converter. Consequently it is possible to conduct an active compensation and the transmitters with excellent measurements and exceptionally attractive price to offer on the market.

Preferred areas of use are

DMP 331i / DMP 333i



Laboratory Techniques



energy production (gas consumption and thermal energy measurement)

Preferred areas of use are LMP 331i



Environmental Engineering
(water / sewage / recycling)




Chemical / petrochemical industry

Pressure ranges DMP 331 i ¹								
Nominal pressure gauge / absolute	[bar]	0.4	1	2	4	10	20	40
Overpressure	[bar]	2	5	10	20	40	80	105
Burst pressure	[bar]	3	7,5	15	25	50	120	210
¹ On customer request we adjust the device within the turn-down-possibility by software on the required pressure range.								
Vacuum ranges								
Nominal pressure	[bar]	-0.4 ... 0.4	-1 ... 1	-1 ... 2	-1 ... 4	-1 ... 10		
Overpressure	[bar]	2	5	10	20	40		
Burst pressure	[bar]	3	7.5	15	25	50		
Pressure ranges DMP 333 i ¹								
Nominal pressure gauge / absolute	[bar]	60	100	200	400	600		
Overpressure	[bar]	210	210	600	1000	1000		
Burst pressure	[bar]	420	420	1000	1250	1250		
¹ On customer request we adjust the device within the turn-down-possibility by software on the required pressure range.								
Pressure ranges LMP 331 i ¹								
Nominal pressure gauge / absolute	[bar]	0.4	1	2	4	10	20	40
Level gauge	[mH ₂ O]	4	10	20	40	100	200	400
Overpressure	[bar]	2	5	10	20	40	80	105
Burst pressure	[bar]	3	7.5	15	25	80	120	210
¹ On customer request we adjust the device within the turn-down-possibility by software on the required pressure range.								
Output signal / Supply								
Standard	2-wire: 4 ... 20 mA / V _S = 12 ... 36 V _{DC}							
Option IS-protection	2-wire: 4 ... 20 mA / V _S = 14 ... 28 V _{DC}							
Options	2-wire: 4 ... 20 mA with communication interface ² 3-wire: 0 ... 10 V / V _S = 14 ... 36 V _{DC} 0 ... 10 V with communication interface ²							
² only possible with el. connection Binder series 723 (7-pin)								
Performance								
Accuracy performance after turn-down - TD ≤ 1:5 - TD > 1:5	IEC 60770 ³ : ≤ ± 0.1 % FSO no change of accuracy ⁴ for calculation use the following formula (for nominal pressure ranges ≤ 0.40 bar see note 3): ≤ ± [0.1 + 0.015 x turn-down] % FSO with turn-down = nominal pressure range / adjusted range e.g. with a turn-down of 1:10 following accuracy is calculated: ≤ ± (0.1 + 0.015 x 10) % FSO i.e. accuracy is ≤ ± 0.25 % FSO							
Permissible load	current 2-wire: R _{max} = [(V _S - V _S min) / 0.02 A] Ω voltage 3-wire: R _{min} = 10 kΩ							
Influence effects	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / kΩ							
Long term stability	≤ ± (0.1 x turn-down) % FSO / year							
Response time	approx. 200 msec							
Adjustability	configuration of following parameters possible (interface / software necessary ⁵): - electronic damping: 0 ... 100 sec - offset: 0 ... 90 % FSO - turn down of span: max. 1:10							
³ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)								
⁴ except nominal pressure ranges ≤ 0.40 bar; for these calculation of accuracy is as follows: ≤ ± (0.1 + 0.02 x turn-down) % FSO e.g. turn-down of 1:3: ≤ ± (0.1 + 0.02 x 3) % FSO i.e. accuracy is ≤ ± 0.16 % FSO								
⁵ software, interface, and cable have to be ordered separately (software appropriate for Windows [®] 95, 98, 2000, NT Version 4.0 or higher, and XP)								
Thermal effects (Offset and Span) / Permissible temperatures								
Tolerance band	[% FSO]	≤ ± (0.2 x turn-down) in compensated range -20 ... 80 °C						
TC, average	[% FSO / 10 K]	± (0.02 x turn-down) in compensated range -20 ... 80 °C						
Permissible temperatures		medium: -25 ... 125 °C electronics / environment: -25 ... 85 °C storage: -40 ... 100 °C						
Electrical protection								
Short-circuit protection	permanent							
Reverse polarity protection	no damage, but also no function							
Electromagnetic compatibility	emission and immunity according to EN 61326							


Materials						
Pressure port	stainless steel 1.4404 (316 L)					
Housing	stainless steel 1.4404 (316 L)					
Seals (media wetted)	DMP 331i / LMP 331i: FKM			DMP 333i: NBR		
	optional: welded version ⁶ ; others on request					
Diaphragm	stainless steel 1.4435 (316L)					
Media wetted parts	pressure port, seals, diaphragm					
⁶ welded version only with pressure ports according to EN 837; welded version not available with pressure ranges ≤ 0.16 bar and > 40 bar						
Mechanical stability						
Vibration	10 g RMS (20 ... 2000 Hz)					
Shock	100 g / 11 msec.					
Explosion protection (only for 4 ... 20 mA / 2-wire)						
Approval DX19-DMP 331i	IBExU 10 ATEX 1068 X zone 0: II 1 G Ex ia IIC T4 Ga zone 20: II 1 D Ex ta IIIC T 85 °C, IP6x in preparation					
Safety technical max. values	$U_i = 28$ V, $I_i = 93$ mA, $P_i = 660$ mW, $C_i \approx 0$ nF, $L_i \approx 0$ μ H					
Permissible temperatures for environment	in zone 0: -20 ... 60 °C with p_{atm} 0.8 bar up to 1.1 bar in zone 1 or higher: -25 ... 70 °C					
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1 μ H/m					
Miscellaneous						
Current consumption	signal output current: max. 25 mA signal output voltage: max. 7 mA					
Weight	approx. 200 g					
Installation position	any ⁷					
Operational life	$> 100 \times 10^6$ pressure cycles					
CE-conformity	EMC Directive: 2004/108/EC			Pressure Equipment Directive: 97/23/EC (module A) ⁸		
⁷ Pressure transmitters are calibrated in a vertical position with the pressure connection down. If this position is changed on installation there can be slight deviations in the zero point for pressure ranges $P_N \leq 1$ bar.						
⁸ This directive is only valid for devices with maximum permissible overpressure > 200 bar						
Wiring diagrams						
2-wire-system (current) 			3-wire-system (voltage) 			
Pin configuration						
Electrical connections	ISO 4400	Binder 723 (5-pin)	Binder 723 (7-pin)	M12x1/ metal (4-pin)	field housing	cable colours (DIN 47100)
Supply +	1	3	3	3	IN +	white
Supply -	2	4	1	1	IN -	brown
Signal + (only for 3-wire)	3	1	6	-	OUT +	green
shield	ground pin	5	2	4	\perp	yellow / green
Communication interface ⁹	RxD	-	4	-	-	-
	TxD	-	5	-	-	-
	GND	-	7	-	-	-
⁹ may not be transmitted directly with the PC (the suitable adapter is available as accessory)						

Electrical connections (dimensions in mm)

standard




ISO 4400
(IP 65)




cable outlet
(IP 68)¹⁰


option




Binder Series 723 5-pin
(IP 67)




cable gland
(IP 67)¹¹



Binder Series 723 7-pin
(IP 67)



M12x1 4-pin
(IP 67)

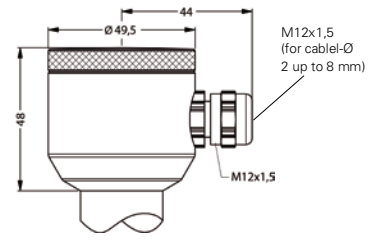


field housing
(IP 67)

¹⁰ different cable types and lengths available, permissible temperature depends on kind of cable
¹¹ standard: 2 m PVC cable (without ventilation tube, permissible temperature: -5 ... 70 °C)


Mechanical connection (dimensions in mm)

standard DMP 331 i / DMP 333 i *

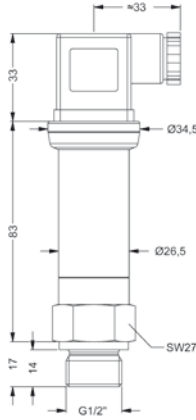

G1/2" DIN 3852


LMP 331 i

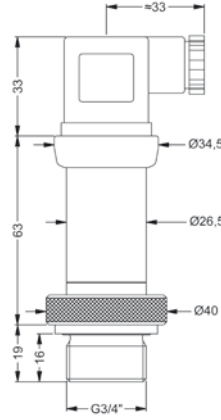


G3/4" DIN 3852

* for nominal pressure $P_N > 400$ bar increases the length of DMP 333i with IS-vesion by 19 mm and of DMP 333i without IS-vesion by 39 mm


option for DMP 331 i and DMP 333 i




G1/2" EN 837




G1/4" DIN 3852




G1/4" EN 837



G1/2" open port



1/2" NPT



1/4" NPT

⇒ metric threads and others on request

Windows® is a registered trade mark of Microsoft Corporation

This data sheet contains product specification, properties are not guaranteed. Subject to change without notice.

