



DMD 331

Differential Pressure Transmitter For Liquids And Gases

Stainless Steel Sensor

**accuracy according to IEC 60770:
0.5 % FSO**

Differential Pressure Transmitter

DMD 331

Differential pressure

from 0 ... 20 mbar
up to 0 ... 16 bar

Output signal

2-wire: 4 ... 20 mA
3-wire: 0 ... 10 V

Special characteristics

- ▶ differential pressure wet / wet
- ▶ permissible static pressure –one sided- up to 30 times of differential pressure range
- ▶ compact design
- ▶ mechanical robust and reliable at dynamic pressures as well as shock and vibration

Optional version

- ▶ different electrical and mechanical connections
- ▶ customer specific versions

CE

The DMD 331 is a differential pressure transmitter for industrial applications and is based on a piezo-resistive stainless steel sensor, which can be pressurized on both sides with fluids or gases compatible with SST 1.4404 and 1.4435.

The compact design allows an integration of the DMD 331 in machines and applications with limited space. The DMD 331 calculates the difference between the pressure on the positive and the negative side and converts it into a proportional electrical signal.

Preferred areas of use are



Plant and Machine Engineering



Energy Industry

Preferred used for



Water

Input pressure range						
Nominal pressure [bar]	0.2	0.4	1	2.5	6	16
Differential pressure range [bar]	0 ... 0.02 up to 0 ... 0.2	0 ... 0.04 up to 0 ... 0.4	0 ... 0.1 up to 0 ... 1	0 ... 0.25 up to 0 ... 2.5	0 ... 0.6 up to 0 ... 6	0 ... 1.6 up to 0 ... 16
Permissible static pressure, one-sided [bar]	0.5	1	3	6	20	60
Output signal / Supply						
Standard	2-wire: 4 ... 20 mA / $V_S = 12 \dots 36 V_{DC}$					
Option 3-wire	3-wire: 0 ... 10 V / $V_S = 14 \dots 36 V_{DC}$					
Performance						
Accuracy	IEC 60770 ¹ : $\leq \pm 0.5 \% \text{ FSO}$					
Permissible load	current 2-wire: $R_{\max} = [(V_S - V_S \text{ min}) / 0.02] \Omega$ voltage 3-wire: $R_{\min} = 10 \text{ k}\Omega$					
Influence effects	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / k Ω					
Long term stability	$\leq \pm 0.2 \% \text{ FSO} / \text{year}$					
Response time	< 5 msec					
¹ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)						
Thermal effects ² (Offset and Span) / Permissible temperatures						
Nominal pressure P_N [bar]	0.2	0.4	≥ 1.0			
Tolerance band [% FSO]	$\leq \pm 2.5$	$\leq \pm 2$	$\leq \pm 1.5$			
TC, average [% FSO / 10 K]	± 0.4	± 0.3	± 0.2			
in compensated range [°C]	0 ... 50		0 ... 70		0 ... 70	
Permissible temperatures	medium: -25 ... 125 °C	electronics / environment: -25 ... 85 °C			storage: -40 ... 100 °C	
² relating to nominal pressure range						
Electrical protection						
Short-circuit protection	permanent					
Reverse polarity protection	no damage, but also no function					
Electromagnetic compatibility	emission and immunity according to EN 61326					
Mechanical stability						
Vibration	10 g RMS (20 ... 2000 Hz)					
Shock	100 g / 11 msec					
Materials						
Pressure port	stainless steel 1.4404					
Housing	aluminium, black anodized					
Seals (media wetted)	FKM / others on request					
Diaphragm	stainless steel 1.4435 (316L)					
Media wetted parts	pressure port, seals, diaphragm					
Miscellaneous						
Current consumption	signal output current: max. 25 mA signal output voltage: max. 7 mA					
Weight	approx. 250 g					
Operational life	> 100 x 10 ⁶ pressure cycles					
Ingress protection	IP 65					
CE-conformity	EMC Directive: 2004/108/EC					
Pin configuration						
Electrical connection	ISO 4400			Brad Harrison [®]		
Supply +	1			A		
Supply -	2			B		
Signal + (only 3-wire)	3			-		
Shield	ground pin			C		
Wiring diagrams						
2-wire-system (current)			3-wire-system (voltage)			

DMD 331


Differential Pressure Transmitter

Technical Data



Electrical connection	
Standard	male and female plug ISO 4400 (IP 65)
Option for 2-wire	Brad Harrison®-Mini Change (IP 67)
Others	on request

Mechanical connection (dimensions in mm)

standard

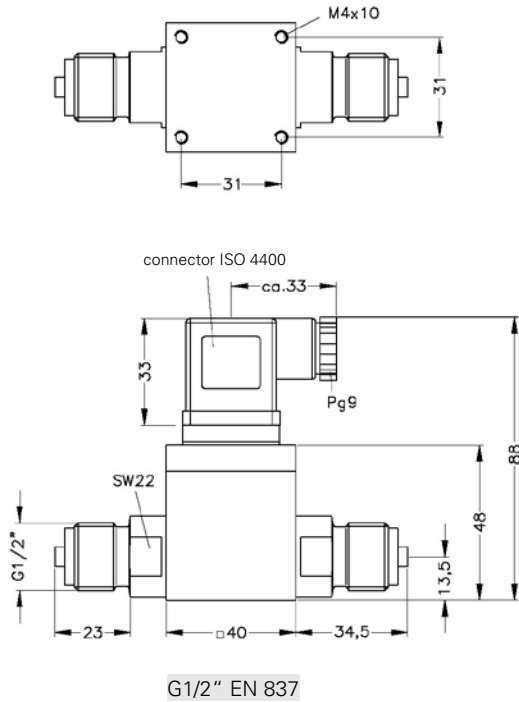

option

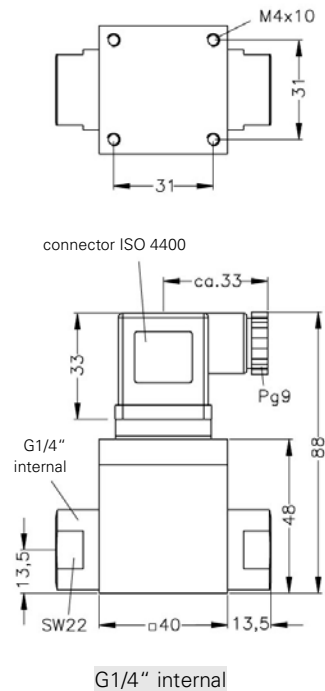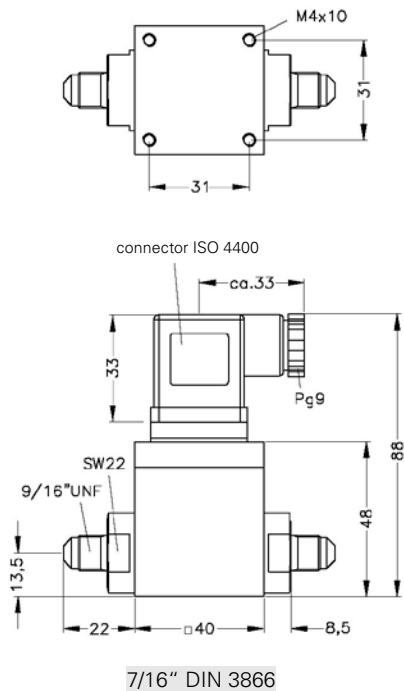

This data sheet contains product specification, properties are not guaranteed. Subject to change without notice.

Ordering code DMD 331

DMD 331

□□□ - □ - □□□□ - □ - □ - □□□ - □□□ - □ - □□□

Pressure										
differential pressure	7	3	0							
Nominal pressure range [bar]										
0.2				F						
0.4				A						
1.0				B						
2.5				C						
6.0				D						
16				E						
customer				9						consult
Differential pressure rang [bar]										
	F	A	B	C	D	E				
0.02	■						0	2	0	0
0.04	■	■					0	4	0	0
0.10	■	■	■				1	0	0	0
0.25	■	■	■	■			2	5	0	0
0.40	■	■	■	■	■		4	0	0	0
0.60	■	■	■	■	■	■	6	0	0	0
1.0	■	■	■	■	■	■	1	0	0	1
2.5	■	■	■	■	■	■	2	5	0	1
4.0	■	■	■	■	■	■	4	0	0	1
6.0	■	■	■	■	■	■	6	0	0	1
10	■	■	■	■	■	■	1	0	0	2
16	■	■	■	■	■	■	1	6	0	2
customer							9	9	9	9
Output										
4 ... 20 mA / 2-wire										1
0 ... 10 V / 3-wire										3
customer										9
Accuracy										
0.5 %										5
customer										9
Electrical connection										
Male and female plug ISO 4400							1	0	0	
Brad Harrison®- Mini Change							B	0	0	consult
customer							9	9	9	consult
Mechanical connection										
G1/2" EN 837							2	0	0	
7/16" UNF DIN 3866							U	0	0	
G1/4" internal thread							J	0	0	
customer							9	9	9	consult
Seals										
FKM										1
customer										9
Special version										
standard										0
customer										9
										0
										9
										9
										consult

This price list contains product specification; properties are not guaranteed. Detailed information about options are defined in the datasheet. Subject to change without notice.

