



CIT 350

Process Display with Contacts and Analogue Output

Functional range

- ▶ free scalable display
- ▶ five characteristic curve functions selectable (linear, square, square root, user defined or tank volume)
- ▶ switching mode, hysteresis, timing of contacts settable
- ▶ display brightness and filter adjustable
- ▶ acoustic signal

Product characteristics

- ▶ input 0/4 ... 20 mA, 0/1/2 ... 5/10 V
- ▶ 4-digit LED display
- ▶ transducer supply 24 V_{DC}
- ▶ interface RS-485 (Modbus RTU)
- ▶ front panel housing 48 x 96 mm


Optional versions

- ▶ output 2/4 relay / OC
- ▶ output 4 ... 20 mA / 0 ... 10 V

Typical application



filter controlling

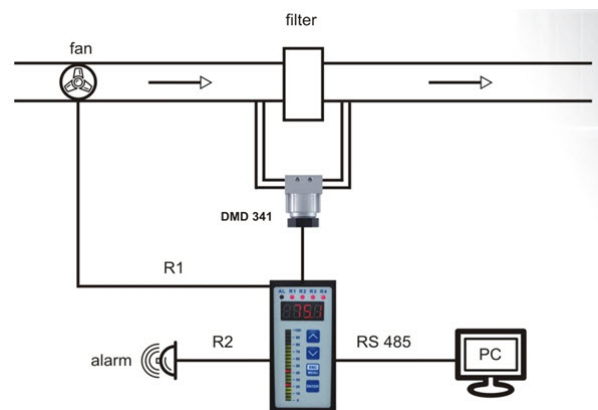

Supply	
Supply voltage / power consumption	85 ... 260 V _{AC} / V _{DC} / max. 6,5 W 16 ... 35 V _{AC} / 19 ... 50 V _{DC} / max. 6,5 VA
Transducer supply	24 V _{DC} + 5%, - 10%, max. 100 mA
Signal input	
Input signal	0/4 ... 20 mA, 0/1 ... 5 V, 0/2 ... 10 V
Accuracy (25 °C)	± 0,1 % FSO, stability: 50 ppm/°C
Contacts	
Contact	2/4 SPST relay, max. 30 V _{DC} / 250 V _{AC} , max. 1 A (cos φ 1) 2/4 OC, max. 30 V _{DC} , max. 30 mA (cos φ 1), max. 100mW
Analogue output	
Output signal / load ¹	0/4 ... 20 mA active / max. 700 Ω 4 ... 20 mA passive / max. 600 Ω (24V DC) 0/1 ... 5 V, 0/2 ... 10 V active / min. 2000 Ω
¹ analogue output only with 2 contacts	
Display	
Display	LED, red, 4 x 9 mm + bargraph, red/green, 20 points
Display range	0/4 ... 20 mA, 0/1 ... 5 V, 0/2 ... 10 V: - 999 ... 9999 + decimal point
Communication	
Communication interface	RS-485 (Modbus RTU), 8N1/8N2, 1200 – 115200 bit/s
Ingress protection	
Standard	IP 65 (front side), IP 20 (case and connectors)
Option	IP 65 (front side with additional sealing frame for panel cut-out), IP 20 (case and connectors)
Permissible temperatures	
Standard	environment: 0 ... 50 °C, storage: -10 ... 70 °C
Option	environment: -20 ... 50 °C, storage: -20 ... 70 °C
Electrical protection	
Electrical safety	EN 61010-1
EMC	EN 61326-1
CE-conformity	EMC Directive: 2014/30/EU
Housing	
Housing type / dimensions	front panel mounting / 48 x 96 x 107 mm
Material	NORYL-GFN2S E1
Weight	approx. 220 g
Dimensions	
Accessories	
<p>Hat rail adapter for front panel housing 96 mm</p> <p>Enables mounting on a hat rail TS35.</p> <p>Material number Z900030</p>	

© 2019 BD/SENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

Ordering code CIT 350

CIT 350 - 1 - 1 -

Input type			
0/4 ... 20 mA, 0/1 ... 5 V, 0/2 ... 10 V	8		
Number of outputs			
without	0		
2	2		
3	3		
4	4		
Output type			
without	0		
2x / 4x SPST relay	1		
2x / 4x Open collector	2		
2x SPST relay + 1x 0/4...20 mA active	3		
2x Open collector + 1x 0/4...20 mA active	4		
2x SPST relay + 1x 4...20 mA passive	9		
2x Open collector + 1x 4...20 mA passive	A		
2x SPST relay + 1x 0/1...5 V, 0/2...10V	B		
2x Open collector + 1x 0/1...5 V, 0/2...10V	C		
Supply			
16...35 VAC / 19...50 VDC		3	
85...260 VAC / VDC		4	
Special version			
standard		0	0
sealing frame IP65		0	1
operating temperature -20°C...50°C		0	8
IP65 + operating temp. -20...50°C		0	P
customer		9	9
			consult
Accessories			
hat rail adapter 96 mm		Z900030	

© 2022 BD|SENSORS GmbH - The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

01.01.2022