

DCL 531



Stainless Steel Probe with RS485 Modbus RTU

Stainless Steel Sensor

accuracy according to IEC 61298-2:
0.25 % FSO

Nominal pressure

from 0 ... 1 mH₂O up to 0 ... 250 mH₂O

Output signal

RS485 with Modbus RTU protocol

Special characteristics

- ▶ pressure value
- ▶ diameter 26.5 mm
- ▶ small thermal effect
- ▶ excellent accuracy
- ▶ good long term stability
- ▶ reset function

Optional versions

- ▶ drinking water certificate according to DVGW and KTW
- ▶ different kinds of cables and elastomers

The stainless steel probe DCL 531 with RS485 interface uses the communication protocol Modbus RTU which has found the way in industrial communication as an open protocol. The Modbus protocol is based on a master slave architecture with which up to 247 slaves can be questioned by a master – the data are transferred in binary form.

Basic element is a high quality stainless steel sensor with high requirements for exact measurement with good long term stability.

Preferred areas of use are

Water / filtrated sewage

drinking water system, ground water level measurement, rain spillway basin



pump and booster stations
level measurement in container
water treatment plants
water recycling



Fuel and oil

fuel storage
tank farm



Modbus®

DCL 531

Stainless Steel Probe with RS485 Modbus RTU

Technical Data

Input pressure range																										
Nominal pressure gauge	[bar]	0.1	0.16	0.25	0.4	0.6	1	1.6	2.5	4	6	10	16	25												
Level	[mH ₂ O]	1	1.6	2.5	4	6	10	16	25	40	60	100	160	250												
Overpressure	[bar]	0.5	1	1	2	5	5	10	10	20	40	40	80	80												
Max. ambient pressure (housing): 40 bar																										
Output signal		RS485 with Modbus RTU Protocol																								
Supply		V _s = 9 ... 32 V _{DC}																								
Performance		Accuracy ¹ ≤ ± 0.25 % FSO Long term stability ≤ ± 0.1 % FSO / year at reference conditions Measuring rate 500 Hz Delay time 500 msec																								
¹ accuracy according to IEC IEC 61298-2 – limit point adjustment (non-linearity, hysteresis, repeatability)																										
Thermal effects (offset and span)		Tolerance band ≤ ± 0.75 % FSO in compensated range -20 ... 85 °C																								
Permissible temperatures		Medium -10 ... 70 °C Storage -25 ... 70 °C																								
Electrical protection ²		Short-circuit protection permanent Reverse polarity protection no damage, but also no function Electromagnetic compatibility emission and immunity according to EN 61326																								
² additional external overvoltage protection unit in terminal box KL 1 or KL 2 with atmospheric pressure reference available on request																										
Electrical connection		Cable with sheath material ³ <table border="0" style="width: 100%;"> <tr> <td>PUR (-10 ... 70 °C)</td> <td>black</td> <td>Ø 7.4 mm</td> <td></td> </tr> <tr> <td>FEP (-10 ... 70 °C)</td> <td>black</td> <td>Ø 7.4 mm</td> <td></td> </tr> <tr> <td>TPE-U (-10 ... 70 °C)</td> <td>blue</td> <td>Ø 7.4 mm</td> <td>(with drinking water approval)</td> </tr> </table> Cable capacitance signal line/shield also signal line/signal line: 160 pF/m Cable inductance signal line/shield also signal line/signal line: 1 µH/m Bending radius static installation: 10-fold cable diameter dynamic application: 20-fold cable diameter													PUR (-10 ... 70 °C)	black	Ø 7.4 mm		FEP (-10 ... 70 °C)	black	Ø 7.4 mm		TPE-U (-10 ... 70 °C)	blue	Ø 7.4 mm	(with drinking water approval)
PUR (-10 ... 70 °C)	black	Ø 7.4 mm																								
FEP (-10 ... 70 °C)	black	Ø 7.4 mm																								
TPE-U (-10 ... 70 °C)	blue	Ø 7.4 mm	(with drinking water approval)																							
³ shielded cable with integrated ventilation tube for atmospheric pressure reference																										
Materials (media wetted)		Housing stainless steel 1.4404 (316L) Seals FKM; EPDM (without / with drinking water approval) others on request Diaphragm stainless steel 1.4435 (316L) Protection cap POM-C Cable sheath PUR, FEP, TPE-U																								
Miscellaneous		Drinking water certificate ⁴ according to DVGW W 270 and UBA KTW (with order the indication "with drinking water certificate" is necessary) Adjustable units pressure: mmH ₂ O, mmHg, psi, bar, mbar, g/cm ² , kg/cm ² , Pa, kPa, torr, atm, mH ₂ O, MPa Read out serial number; date of calibration, min- and max-value for pressure Current consumption max. 10 mA Weight approx. 200 g (without cable) Ingress protection IP 68 CE-conformity EMC Directive: 2014/30/EU																								
⁴ only possible with EPDM seal in combination with TPE-U cable																										

DCL 531

Stainless Steel Probe with RS485 Modbus RTU

Technical Data

Wiring diagram / pin configuration		
	Electrical connection	cable colours (IEC 60757)
	Supply +	WH (white)
	Supply -	BN (brown)
	A (+)	GN (green)
	B (-)	YE (yellow)
Reset	PK (pink)	
Shield	GNYE (green-yellow)	

Dimensions (mm / in)	
	<p>protection cap removeable</p>


Configuration Modbus RTU					
Standard configuration	001	-	1	-	1
Address					
address	001				
	...				
	247				
Baud Rate					
4800 Bd			0		
9600 Bd			1		
19200 Bd			2		
38400 Bd			3		
Parity					
None					0
Odd					1
Even					2
Configuration code (to specify with order)		-		-	

DCL 531

Stainless Steel Probe with RS485 Modbus RTU

Accessories

Mounting flange with cable gland

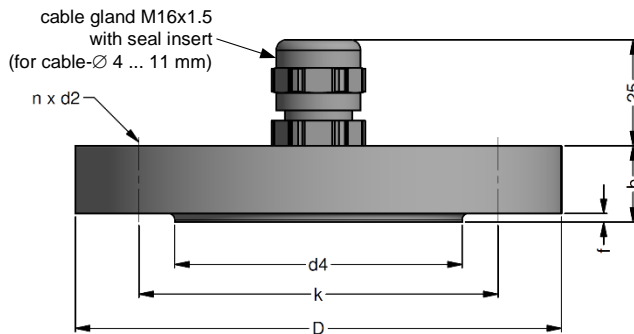

dimensions in mm			
size	DN25 / PN40	DN50 / PN40	DN80 / PN16
b	18	20	20
D	115	165	200
d2	14	18	18
d4	68	102	138
f	2	3	3
k	85	125	160
n	4	4	8

Technical data

Suitable for	all probes		
Flange material	stainless steel 1.4404 (316L)		
Material of cable gland	standard: brass, nickel plated on request: stainless steel 1.4305 (303); plastic		
Seal insert	material: TPE (ingress protection IP 68)		
Hole pattern	according to DIN 2507		
Ordering type	Ordering code	Weight	
DN25 / PN40 with cable gland brass, nickel plated	ZMF2540	1.4 kg	
DN50 / PN40 with cable gland brass, nickel plated	ZMF5040	3.2 kg	
DN80 / PN16 with cable gland brass, nickel plated	ZMF8016	4.8 kg	

Terminal clamp



Technical data

Suitable for	all probes with cable Ø 5.5 ... 10.5 mm		
Material of housing	standard: steel, zinc plated optionally: stainless steel 1.4301 (304)		
Material of clamping jaws	PA (fibre-glass reinforced)		
Dimensions (mm)	174 x 45 x 32		
Hook diameter	20 mm		
Ordering type	Ordering code	Weight	
Terminal clamp, steel, zinc plated	Z100528	approx. 160 g	
Terminal clamp, stainless steel 1.4301 (304)	Z100527		

© 2025 BDSENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

DCL531_E_080425

Tel.: +49 (0) 92 35 / 98 11- 0
Fax: +49 (0) 92 35 / 98 11- 11

www.bdsensors.de
info@bdsensors.de

BDSENSORS
pressure measurement

