



DMD 331

Differential Pressure Transmitter for Liquids and Gases

Stainless Steel Sensor

accuracy according to IEC 60770:
0.5 % FSO

Differential pressure

from 0 ... 20 mbar up to 0 ... 16 bar

Output signals

2-wire: 4 ... 20 mA

3-wire: 0 ... 10 V

Special characteristics

- ▶ differential pressure wet / wet
- ▶ permissible static pressure -onesided- up to 30 times of differential pressure range
- ▶ compact design
- ▶ mechanical robust and reliable at dynamic pressures as well as shock and vibration



Optional versions

- ▶ IS-version
Ex ia = intrinsically safe for gases and dust
- ▶ different electrical and mechanical connections
- ▶ customer specific versions

The DMD 331 is a differential pressure transmitter for industrial applications and is based on a piezoresistive stainless steel sensor, which can be pressurized on both sides with fluids or gases compatible with SST 1.4404 (316L) and 1.4435 (316L).

The compact design allows an integration of the DMD 331 in machines and applications with limited space. The DMD 331 calculates the difference between the pressure on the positive and the negative side and converts it into a proportional electrical signal.

Preferred areas of use are

-  Plant and machine engineering
-  Energy industry

Preferred used for

-  Water



Input pressure range						
Nominal pressure [bar]	0.2	0.4	1	2.5	6	16
Differential pressure range [bar]						
TD 1 : 1 up to	0 ... 0.2	0 ... 0.4	0 ... 1	0 ... 2.5	0 ... 6	0 ... 16
TD 1 : 10	0 ... 0.02	0 ... 0.04	0 ... 0.1	0 ... 0.25	0 ... 0.6	0 ... 1.6
Permissible static pressure, one-sided [bar]	0.5	1	3	6	20	60

Output signal / Supply	
Standard	2-wire: 4 ... 20 mA / $V_S = 12 \dots 36 V_{DC}$
Option IS-version	2-wire: 4 ... 20 mA / $V_S = 14 \dots 28 V_{DC}$
Option 3-wire	3-wire: 0 ... 10 V / $V_S = 14 \dots 36 V_{DC}$

Performance	
Accuracy ¹	for ranges of max. input pressure $P_N > 1$ bar (codes C, D, E) $\leq \pm 0.5$ % FSO (differential pressure range with TD from 1:1 up to 1:5) $\leq \pm 1$ % FSO (differential pressure range with TD > 1:5 up to 1:10) for ranges of max. input pressure $P_N \leq 1$ bar (codes A, B, F) $\leq \pm 0.5$ % FSO (differential pressure range with TD from 100 to 50 % from nominal pressure) $\leq \pm 1$ % FSO (differential pressure range with TD > 50 to 10 % from nominal pressure)
Permissible load	current 2-wire: $R_{max} = [(V_S - V_S \text{ min}) / 0.02 \text{ A}] \Omega$ voltage 3-wire: $R_{min} = 10 \text{ k}\Omega$
Influence effects	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / $k\Omega$
Long term stability	$\leq \pm 0.2$ % FSO / year at reference conditions
Response time	< 5 msec

¹ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)

Thermal effects ² (Offset and Span) / Permissible temperatures			
Nominal pressure P_N [bar]	0.2	0.4	≥ 1.0
Tolerance band [% FSO]	$\leq \pm 2.5$	$\leq \pm 2$	$\leq \pm 1.5$
TC, average [% FSO / 10 K]	± 0.4	± 0.3	± 0.2
in compensated range [°C]	0 ... 50		0 ... 70
Permissible temperatures	medium: -25 ... 125 °C	electronics / environment: -25 ... 85 °C	storage: -40 ... 100 °C

² relating to nominal pressure range

Electrical protection	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Electromagnetic compatibility	emission and immunity according to EN 61326

Mechanical stability	
Vibration	10 g RMS (20 ... 2000 Hz)
Shock	100 g / 11 msec

Materials	
Pressure port	stainless steel 1.4404 (316L)
Housing	aluminium, black anodized
Seals (media wetted)	FKM / others on request
Diaphragm	stainless steel 1.4435 (316L)
Media wetted parts	pressure port, seals, diaphragm

Miscellaneous	
Current consumption	signal output current: max. 25 mA signal output voltage: max. 7 mA
Weight	approx. 250 g
Operational life	100 million load cycles
Ingress protection	IP 65
CE-conformity	EMC Directive: 2014/30/EU
ATEX Directive	2014/34/EU

Explosion protection (only for 4 ... 20 mA / 2 wire)	
Approvals	IBExU 08 ATEX 1125 X
DX13A-DMD 331	zone 1: II 2G Ex ia IIC T4 Gb zone 21: II 2D Ex ia IIIC T85°C Db
Safety technical maximum values	$U_i = 28 V_{DC}$, $I_i = 93 \text{ mA}$, $P_i = 660 \text{ mW}$, $C_i \leq 1 \text{ nF}$, $L_i \leq 10 \mu\text{H}$, the supply connections have an inner capacity of max. 27 nF to the housing
Permissible temperatures for environment	-25 ... 65 °C

Pin configuration	
Electrical connection	ISO 4400
Supply +	1
Supply -	2
Signal + (only 3-wire)	3
Shield	ground pin


DMD 331

Differential Pressure Transmitter


Technical Data

Wiring diagrams

2-wire-system (current)




3-wire-system (voltage)


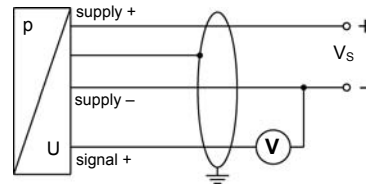


Mechanical connection (dimensions in mm)

standard

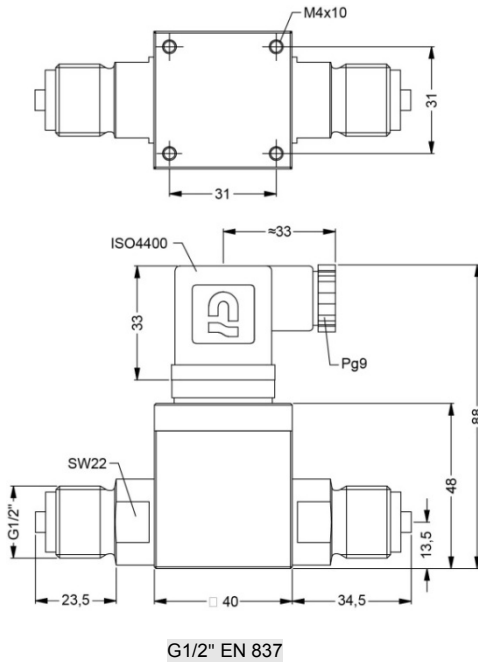

option

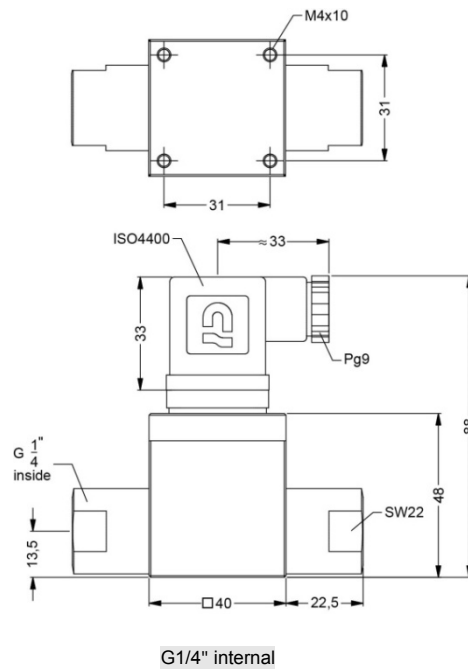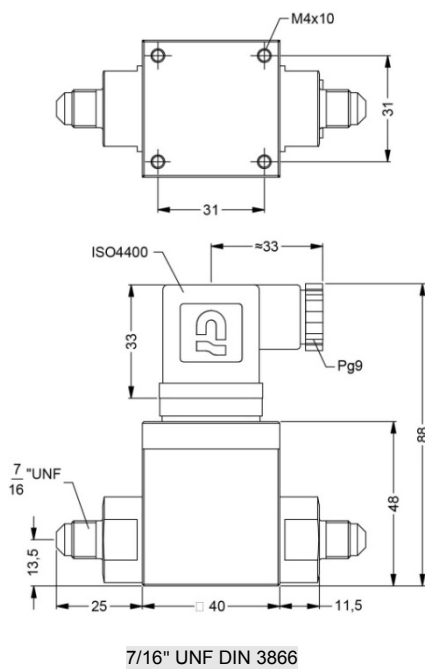

© 2018 BDSSENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

Ordering code DMD 331

DMD 331

 - - - - - - -

Pressure																			
differential pressure	7	3	0																
Nominal pressure range [bar]																			
0.2				F															
0.4				A															
1.0				B															
2.5				C															
6.0				D															
16				E															
customer				9											consult				
Differential pressure range [bar]																			
0.02				F	A	B	C	D	E			0	2	0	0				
0.04	■											0	4	0	0				
0.10	■	■										1	0	0	0				
0.25	■	■	■									2	5	0	0				
0.40	■	■	■	■								4	0	0	0				
0.60					■							6	0	0	0				
1.0						■						1	0	0	1				
2.5							■					2	5	0	1				
4.0								■				4	0	0	1				
6.0									■			6	0	0	1				
10										■		1	0	0	2				
16											■	1	6	0	2				
customer												9	9	9	9	consult			
Output																			
4 ... 20 mA / 2-wire															1				
intrinsic safety 4 ... 20 mA / 2 wire															E				
0 ... 10 V / 3-wire															3				
customer															9	consult			
Accuracy																			
TD ≤ 1:5	0.5 %														5				
TD > 1:5 up to 1:10	1.0 %														8				
customer															9	consult			
Electrical connection																			
Male and female plug ISO 4400															1	0	0		
customer															9	9	9		
Mechanical connection																			
G1/2" EN 837																2	0	0	
7/16" UNF DIN 3866																U	0	0	
G1/4" internal thread																J	0	0	
customer																9	9	9	
Seals																			
FKM																	1		
customer																	9	consult	
Special version																			
standard																	0	0	0
customer																	9	9	9

