

DMP 339

Industrial Pressure Transmitter

Stainless Steel Sensor

accuracy according to IEC 60770:
0.35 % FSO



Nominal pressure

from 0 ... 60 bar to 0 ... 600 bar

Output signals

2-wire: 4 ... 20 mA

3-wire: 0 ... 20 mA / 0 ... 10 V

others on request

Special characteristics

- ▶ mechanical connection:
G 1/4" flush
- ▶ suitable for viscous
and pasty media

Optional versions

- ▶ IS-version
Ex ia = intrinsically safe for
gases and dusts
- ▶ several electrical connections
- ▶ customer specific versions

The DMP 339 industrial pressure transmitter features a G 1/4" flush pressure port and was designed for the use in a range of machinery including metering systems. It is ideal for measuring the pressure of viscous and pasty media, as only a small dead space is created.

Material accumulation, dripping and stringing in machinery is eliminated. This increases the efficiency and reliability of your machines.

The DMP 339 is available with various electrical connections, ensuring an excellent adaption to the application conditions.

Preferred areas of use are:



Plant and machine engineering
- especially conveyor plants and
dosing systems



Hydraulics



Input pressure range ¹						
Nominal pressure gauge / abs. [bar]	60	100	160	250	400	600 ²
Overpressure [bar]	210	210	600	600	1050	1050
Burst pressure ≥ [bar]	300	300	750	750	1200	1400
¹ nominal pressure $p_N < 60$ bar on request						
² nominal pressure 600 bar without UL certification						
Output signal / Supply						
Standard	2-wire: 4 ... 20 mA / $V_S = 8 ... 32 V_{DC}$					
Option IS-version	2-wire: 4 ... 20 mA / $V_S = 10 ... 28 V_{DC}$					
Options 3-wire	3-wire: 0 ... 20 mA / $V_S = 14 ... 30 V_{DC}$ 0 ... 10 V / $V_S = 14 ... 30 V_{DC}$					
Performance						
Accuracy ³	≤ ± 0.35 % FSO					
Permissible load	current 2-wire:	$R_{max} = [(V_S - V_{S min}) / 0.02 A] \Omega$				
	current 3-wire:	$R_{max} = 500 \Omega$				
	voltage 3-wire:	$R_{min} = 10 k\Omega$				
Influence effects	supply:	0.05 % FSO / 10 V				
	load:	0.05 % FSO / kΩ				
Long term stability	≤ ± 0.1 % FSO / year at reference conditions					
Response time	2-wire:	≤ 10 msec				
	3-wire:	≤ 3 msec				
³ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)						
Thermal effects (offset and span)						
Tolerance band	≤ ± 1 % FSO					
in compensated range	-20 ... 85 °C					
Permissible temperatures						
Medium	-40 ... 125 °C					
Electronics / environment	-40 ... 85 °C					
Storage	-40 ... 100 °C					
Electrical protection						
Short-circuit protection	permanent					
Reverse polarity protection	no damage, but also no function					
Electromagnetic compatibility	emission and immunity according to EN 61326					
Mechanical stability						
Vibration	20 g RMS / 10... 2000 Hz	according to DIN EN 60068-2-6				
Shock	500 g / 1 msec half sine	according to DIN EN 60068-2-27				
Materials						
Pressure port	stainless steel 1.4548 (17-4 PH ERS)					
Housing	stainless steel 1.4404 (316 L)					
Option compact field housing	stainless steel 1.4301 (304) cable gland M12x1.5, brass, nickel plated (clamping range 2 ... 8 mm)					
Seals	FKM; others on request					
Diaphragm	stainless steel 1.4435 (316 L)					
Media wetted parts	pressure port, diaphragm					
Explosion protection (only for 4 ... 20 mA / 2-wire)						
Approvals DX19-DMP 339	IBExU 10 ATEX 1068 X / IECEx IBE 12.0027X zone 0: II 1G Ex ia IIC T4 Ga zone 20: II 1D Ex ia IIIC T135 °C Da					
Safety technical maximum values	$U_i = 28 V_{DC}$, $I_i = 93 mA$, $P_i = 660 mW$, $C_i \approx 0 nF$, $L_i \approx 0 \mu H$, $C_{iGND} \approx 27 nF$					
Permissible temperatures for environment	in zone 0:	-20 ... 60 °C with p_{atm} 0.8 bar up to 1.1 bar				
	in zone 1 or higher:	-40/-20 ... 70 °C				
Connecting cables (by factory)	cable capacitance:	signal line/shield also signal line/signal line: 160 pF/m				
	cable inductance:	signal line/shield also signal line/signal line: 1 μH/m				
Miscellaneous						
Current consumption	signal output current:	max. 25 mA				
	signal output voltage:	max. 7 mA				
Weight	approx. 120 g					
Installation position	any ⁴					
Operational life	100 million load cycles					
CE-conformity	EMC Directive: 2014/30/EU			Pressure Equipment Directive: 2014/68/EU (module A) ⁵		
ATEX Directive	2014/34/EU					
⁴ Pressure transmitters are calibrated in a vertical position with the pressure connection down.						
⁵ This directive is only valid for devices with maximum permissible overpressure > 200 bar						


DMP 339

Industrial Pressure Transmitter


Technical Data

Wiring diagrams

2-wire-system (current)




3-wire-system (current / voltage)

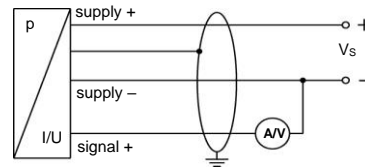


Pin configuration

Electrical connection	ISO 4400	Binder 723 (5-pin)	M12x1 / metal (4-pin)	compact field housing	cable colours (IEC 60757)
Supply +	1	3	1	V _s +	WH (white)
Supply -	2	4	2	V _s -	BN (brown)
Signal + (only for 3-wire)	3	1	3	S+	GN (green)
Shield	ground pin	5	4	GND	GNYE (green-yellow)


Electrical connections (dimensions mm / in)




ISO 4400 (IP 65)




Binder series 723, 5-pin (IP 67)




M12x1, 4-pin (IP 67)



compact field housing (IP 67)



cable outlet with PVC-cable (IP 67) ⁶




cable outlet, cable with ventilation tube (IP 68) ⁷

⇒ universal field housing stainless steel 1.4404 (316 L) with cable gland M20x1.5 (ordering code 880) and other versions on request

⁶ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C)

⁷ different cable types and lengths available, permissible temperature depends on kind of cable

Dimensions (mm / in)

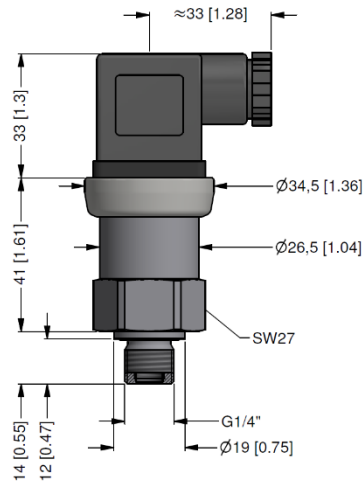

G1/4" flush DIN 3852

Accessories

Plug-on Display PA 430



Functional range

- ▶ free scalable display
- ▶ switch mode, hysteresis, parameterizable deceleration of the contacts
- ▶ display 330 ° rotatable
- ▶ connector 300 ° rotatable
- ▶ no external power supply necessary

Product characteristics

- ▶ plug-on display for pressure transmitter with output signal:
4 ... 20 mA / 2-wire or
0 ... 10 V / 3-wire
- ▶ 4-digit LED display

Optional versions

- ▶ IS-version
- ▶ 1 or 2 programmable contacts

Ordering code DMP 339

DMP 339



Pressure										
gauge	1	3	5							
absolute	1	3	6							
Input										
[bar] ¹										
60		6	0	0	2					
100		1	0	0	3					
160		1	6	0	3					
250		2	5	0	3					
400		4	0	0	3					
600 ²		6	0	0	3					
customer		9	9	9	9					consult
Output										
4 ... 20 mA / 2-wire									1	
0 ... 20 mA / 3-wire									2	
0 ... 10 V / 3-wire									3	
intrinsic safety 4 ... 20 mA / 2-wire									E	
customer									9	consult
Accuracy										
0.35 % FSO									3	
customer									9	consult
Electrical connection										
male and female plug ISO 4400									1	0
male plug Binder series 723 (5-pin)									2	0
cable outlet with PVC cable (IP67) ³									T	A
cable outlet,									T	R
cable with ventilation tube (IP68) ⁴										0
male plug M12x1 (4-pin) / metal									M	1
compact field housing									8	5
stainless steel 1.4301 (304)										0
customer									9	9
Mechanical connection										
G1/4" DIN 3852									F	0
with flush sensor										2
customer									9	9
Seals										
FKM										1
customer										9
Special version										
standard										0
customer										9
										0
										9
										9
										consult

¹ nominal pressure gauge $p_N < 60$ bar on request

² nominal pressure 600 bar without UL certification

³ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70°C), others on request

⁴ code TR0 = PVC cable, cable with ventilation tube available in different types and lengths