

# DMP 339

## Industrial Pressure Transmitter

Stainless Steel Sensor

accuracy according to IEC 60770:  
0.35 % FSO



### Nominal pressure

from 0 ... 60 bar to 0 ... 600 bar

### Output signals

2-wire: 4 ... 20 mA

3-wire: 0 ... 20 mA / 0 ... 10 V

others on request

### Special characteristics

- ▶ mechanical connection: G 1/4" flush
- ▶ suitable for viscous and pasty media

### Optional versions

- ▶ IS-version  
Ex ia = intrinsically safe for gases and dusts
- ▶ several electrical connections
- ▶ customer specific versions

The DMP 339 industrial pressure transmitter features a G 1/4" flush pressure port and was designed for the use in a range of machinery including metering systems. It is ideal for measuring the pressure of viscous and pasty media, as only a small dead space is created.

Material accumulation, dripping and stringing in machinery is eliminated. This increases the efficiency and reliability of your machines.

The DMP 339 is available with various electrical connections, ensuring an excellent adaption to the application conditions.

### Preferred areas of use are:



Plant and machine engineering  
- especially conveyor plants and dosing systems



Hydraulics



# DMP 339


Industrial Pressure Transmitter

Technical Data


Input pressure range <sup>1</sup>							
Nominal pressure gauge / abs.	[bar]	60	100	160	250	400	600 <sup>2</sup>
Overpressure	[bar]	210	210	600	600	1050	1050
Burst pressure ≥	[bar]	300	300	1100	1100	1500	1500
<sup>1</sup> nominal pressure $P_N < 60$ bar on request							
<sup>2</sup> nominal pressure 600 bar without UL certification							
Output signal / Supply							
Standard	2-wire:	4 ... 20 mA / $V_S = 8 \dots 32 V_{DC}$					
Option IS-protection	2-wire:	4 ... 20 mA / $V_S = 10 \dots 28 V_{DC}$					
Options 3-wire	3-wire:	0 ... 20 mA / $V_S = 14 \dots 30 V_{DC}$					
		0 ... 10 V / $V_S = 14 \dots 30 V_{DC}$					
Performance							
Accuracy <sup>3</sup>		≤ ± 0.35 % FSO					
Permissible load	current 2-wire:	$R_{max} = [(V_S - V_S \text{ min}) / 0.02 \text{ A}] \Omega$					
	current 3-wire:	$R_{max} = 500 \Omega$					
	voltage 3-wire:	$R_{min} = 10 \text{ k}\Omega$					
Influence effects	supply:	0.05 % FSO / 10 V					
	load:	0.05 % FSO / k $\Omega$					
Long term stability		≤ ± 0.1 % FSO / year at reference conditions					
Response time	2-wire:	≤ 10 msec					
	3-wire:	≤ 3 msec					
<sup>3</sup> accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)							
Thermal effects (Offset and Span)							
Tolerance band		≤ ± 1 % FSO					
in compensated range		-20 ... 85 °C					
Permissible temperatures							
Permissible temperatures	medium:	-40 ... 125 °C					
	electronics / environment:	-40 ... 85 °C					
	storage:	-40 ... 100 °C					
Electrical protection							
Short-circuit protection		permanent					
Reverse polarity protection		no damage, but also no function					
Electromagnetic compatibility		emission and immunity according to EN 61326					
Mechanical stability							
Vibration		10 g RMS (25 ... 2000 Hz) according to DIN EN 60068-2-6					
Shock		100 g / 11 msec according to DIN EN 60068-2-27					
Materials							
Pressure port		stainless steel 1.4548 (17-4 PH ERS) for G1/4" flush (DIN 3852)					
Housing		stainless steel 1.4404 (316 L)					
Option compact field housing		stainless steel 1.4305 (303), cable gland brass, nickel plated others on request					
Seals		FKM others on request					
Diaphragm		stainless steel 1.4435 (316 L)					
Media wetted parts		pressure port, diaphragm					
Explosion protection (only for 4 ... 20 mA / 2-wire)							
Approvals DX19-DMP 339		IBExU 10 ATEX 1068 X / IECEx IBE 12.0027X zone 0: II 1G Ex ia IIC T4 Ga zone 20: II 1D Ex ia IIIC T 85°C Da					
Safety technical maximum values		$U_i = 28 V_{DC}$ , $I_i = 93 \text{ mA}$ , $P_i = 660 \text{ mW}$ , $C_i \approx 0 \text{ nF}$ , $L_i \approx 0 \mu\text{H}$ , $C_{IGND} \approx 27 \text{ nF}$					
Ambient temperature range	in zone 0:	-20 ... 60 °C with $p_{atm}$ 0.8 bar up to 1.1 bar					
	in zone 1 or higher:	-20 ... 70 °C					
Connecting cables (by factory)		cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1 $\mu\text{H}/\text{m}$					
Miscellaneous							
Current consumption		signal output current: max. 25 mA		signal output voltage: max. 7 mA			
Weight		approx. 120 g					
Installation position		any <sup>4</sup>					
Operational life		100 million load cycles					
CE-conformity		EMC Directive: 2014/30/EU			Pressure Equipment Directive: 2014/68/EU (module A) <sup>5</sup>		
ATEX Directive		2014/34/EU					
<sup>4</sup> Pressure transmitters are calibrated in a vertical position with the pressure connection down.							
<sup>5</sup> This directive is only valid for devices with maximum permissible overpressure > 200 bar							

### Wiring diagrams

2-wire-system (current)

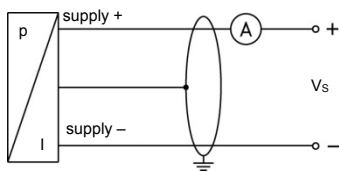

3-wire-system (current / voltage)

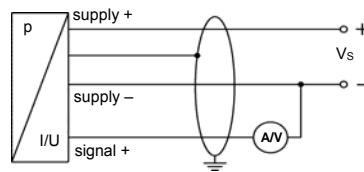


### Pin configuration

Electrical connection	ISO 4400	Binder 723 (5-pin)	M12x1 / Metal (4-pin)	field housing	cable colour (IEC 60757)
Supply +	1	3	1	IN +	wh (white)
Supply -	2	4	2	IN -	bn (brown)
Signal + (for 3-wire)	3	1	3	OUT +	gn (green)
Shield	ground pin	5	4		gnye (green-yellow)


### Electrical connections (dimensions in mm)

standard


option




ISO 4400 (IP 65)




Binder Series 723 5-pin (IP 67)




M12x1 4-pin (IP 67)

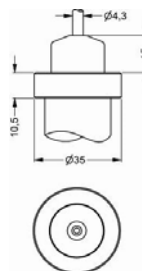

cable outlet with PVC cable (IP 67)<sup>6</sup>

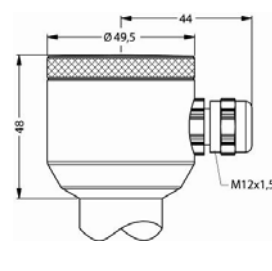

compact field housing (IP 67)

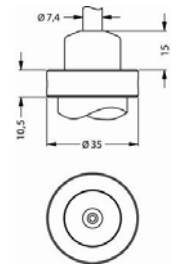


cable outlet, cable with ventilation tube (IP 68)<sup>7</sup>

⇒ universal field housing stainless steel 1.4404 (316 L) with cable gland M20x1.5 metal (ordering code 880) and other versions on request

<sup>6</sup> standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C)

<sup>7</sup> different cable types and lengths available, permissible temperature depends on kind of cable

### Mechanical connections (dimensions in mm)

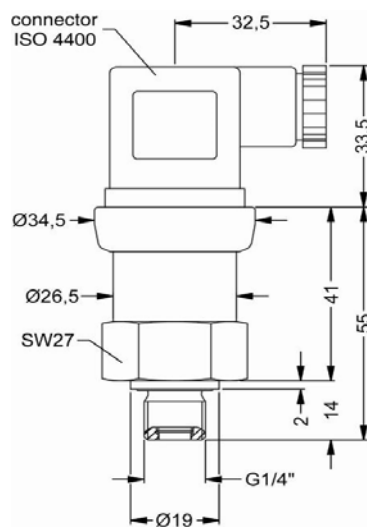

G1/4" flush DIN 3852

## Ordering code DMP 339

DMP 339

Pressure											
	gauge	1	3	5							
	absolute	1	3	6							
Input											
	[bar]	<sup>1</sup>									
	60	6	0	0	2						
	100	1	0	0	3						
	160	1	6	0	3						
	250	2	5	0	3						
	400	4	0	0	3						
	600 <sup>2</sup>	6	0	0	3						
	customer	9	9	9	9					consult	
Output											
	4 ... 20 mA / 2-wire				1						
	0 ... 20 mA / 3-wire				2						
	0 ... 10 V / 3-wire				3						
	Intrinsic safety 4 ... 20 mA / 2-wire				E						
	customer				9					consult	
Accuracy											
	0.35 %				3						
	customer				9					consult	
Electrical connection											
	Male and female plug ISO 4400				1	0	0				
	Male plug Binder series 723 (5-pin)				2	0	0				
	Cable outlet with PVC cable <sup>3</sup>				T	A	0				
	Cable outlet <sup>4</sup>				T	R	0				
	Male plug M12x1 (4-pin) / metal				M	1	0				
	Compact field housing				8	5	0				
	stainless steel 1.4305 (303)				9	9	9				
	customer				9	9	9				consult
Mechanical connection											
	G1/4" DIN 3852						F	0	2		
	with flush sensor						9	9	9		
	customer						9	9	9	consult	
Seals											
	FKM						1				
	customer						9				consult
Special version											
	standard						0	0	0		
	customer						9	9	9	consult	

© 2017 BD|SENSORS GmbH - The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

08.12.2017