

DMP 331i DMP 333i

Precision Pressure Transmitter

Stainless Steel Sensor

accuracy according to IEC 60770:
0.1 % FSO



Nominal pressure

from 0 ... 400 mbar up to 0 ... 600 bar

Output signal

2-wire: 4 ... 20 mA

3-wire: 0 ... 10 V

others on request

Product characteristics

- ▶ thermal error in compensated range
-20 ... 80 °C: 0.2 % FSO
TC 0.02 % FSO / 10K
- ▶ Turn-Down 1:10
- ▶ communication interface for adjusting
of offset, span and damping



Optional versions

- ▶ IS-versions
Ex ia = intrinsically safe for gases and
dusts
- ▶ adjustment of nominal pressure
gauges (factory-provided)

The precision pressure transmitter DMP 331i and DMP 333i demonstrate the further development of our industrial pressure transmitters.

The signal processing of sensor signal is done by digital electronics with 16-bit analog digital converter. Consequently it is possible to conduct an active compensation and the transmitters with excellent measurements and exceptionally attractive price to offer on the market.

Preferred areas of use are

-  Laboratory Techniques
-  Energy production (gas consumption and thermal energy measurement)



Pressure ranges DMP 331 i ¹										
Nominal pressure gauge / absolute	[bar]	0.4	1	2	4	10	20	40	60	
Overpressure	[bar]	2	5	10	20	40	80	105	105	
Burst pressure	[bar]	3	7,5	15	25	50	120	210	210	
Vacuum ranges										
Nominal pressure	[bar]	-0.4 ... 0.4		-1 ... 1		-1 ... 2		-1 ... 4		-1 ... 10
Overpressure	[bar]	2		5		10		20		40
Burst pressure	[bar]	3		7.5		15		25		50
Pressure ranges DMP 333 i ¹										
Nominal pressure gauge / absolute	[bar]	100			200		400		600	
Overpressure	[bar]	210			600		1000		1000	
Burst pressure	[bar]	420			1000		1250		1250	
¹ On customer request we adjust the device within the turn-down-possibility by software on the required pressure range.										
Output signal / Supply										
Standard	2-wire: 4 ... 20 mA / V _S = 12 ... 36 V _{DC}									
Option IS-protection	2-wire: 4 ... 20 mA / V _S = 14 ... 28 V _{DC}									
Options analog signal	2-wire: 4 ... 20 mA with communication interface ² 3-wire: 0 ... 10 V / V _S = 14 ... 36 V _{DC} 0 ... 10 V with communication interface ²									
² only possible with el. connection Binder series 723 (7-pin)										
Performance										
Accuracy performance after turn-down - TD ≤ 1:5 - TD > 1:5	IEC 60770 ³ : ≤ ± 0.1 % FSO no change of accuracy ⁴ for calculation use the following formula (for nominal pressure ranges ≤ 0.40 bar see note 4): ≤ ± [0.1 + 0.015 x turn-down] % FSO with turn-down = nominal pressure range / adjusted range e.g. with a turn-down of 1:10 following accuracy is calculated: ≤ ± (0.1 + 0.015 x 10) % FSO i.e. accuracy is ≤ ± 0.25 % FSO									
Permissible load	current 2-wire: R _{max} = [(V _S - V _S min) / 0.02 A] Ω voltage 3-wire: R _{min} = 10 kΩ									
Influence effects	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / kΩ									
Long term stability	≤ ± (0.1 x turn-down) % FSO / year at reference conditions									
Response time	approx. 5 msec									
Adjustability	configuration of following parameters possible (interface / software necessary ⁵): - electronic damping: 0 ... 100 sec - offset: 0 ... 90 % FSO - turn down of span: max. 1:10									
³ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)										
⁴ except nominal pressure ranges □ ≤ 0.40 bar; for these calculation of accuracy is as follows: ≤ ± (0.1 + 0.02 x turn-down) % FSO e.g. turn-down of 1:3: ≤ ± (0.1 + 0.02 x 3) % FSO i.e. accuracy is ≤ ± 0.16 % FSO										
⁵ software, interface, and cable have to be ordered separately (software appropriate for Windows® 95, 98, 2000, NT Version 4.0 or higher, and XP)										
Thermal effects (Offset and Span) / Permissible temperatures										
Tolerance band [% FSO]	≤ ± (0.2 x turn-down) in compensated range -20 ... 80 °C									
TC, average [% FSO / 10 K]	± (0.02 x turn-down) in compensated range -20 ... 80 °C									
Permissible temperatures	medium: -25 ... 125 °C electronics / environment: -25 ... 85 °C storage: -40 ... 100 °C									
Electrical protection										
Short-circuit protection	permanent									
Reverse polarity protection	no damage, but also no function									
Electromagnetic compatibility	emission and immunity according to EN 61326									
Materials										
Pressure port	stainless steel 1.4404 (316 L)									
Housing	stainless steel 1.4404 (316 L)									
Seals	FKM; NBR welded version ⁶ others on request									
Diaphragm	stainless steel 1.4435 (316L)									
Media wetted parts	pressure port, seal, diaphragm									
⁶ welded version only with pressure ports according to EN 837; welded version not available with pressure ranges > 60 bar										

Mechanical stability	
Vibration	10 g RMS (20 ... 2000 Hz)
Shock	100 g / 11 msec.
Explosion protection (only for 4 ... 20 mA / 2-wire)	
Approvals	DX19-DMP 331i DX19-DMP 333i
	IBExU 10 ATEX 1068 X / IECEx IBE 12.0027X zone 0: II 1G Ex ia IIC T4 Ga zone 20: II 1D Ex ia IIIC T 85°C Da
Safety technical max. values	$U_i = 28 \text{ V}$, $I_i = 93 \text{ mA}$, $P_i = 660 \text{ mW}$, $C_i \approx 0 \text{ nF}$, $L_i \approx 0 \text{ }\mu\text{H}$, the supply connections have an inner capacity of max. 27 nF to the housing
Ambient temperature range	in zone 0: -20 ... 60 °C with p_{atm} 0.8 bar up to 1.1 bar in zone 1 or higher: -20 ... 65 °C
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1 $\mu\text{H}/\text{m}$

Miscellaneous	
Current consumption	signal output current: max. 25 mA signal output voltage: max. 7 mA
Weight	approx. 200 g
Installation position	any ⁷
Operational life	> 100 x 10 ⁶ pressure cycles
CE-conformity	EMC Directive: 2014/30/EU Pressure Equipment Directive: 2014/68/EU (module A) ⁸
ATEX Directive	2014/34/EU

⁷ Pressure transmitters are calibrated in a vertical position with the pressure connection down. If this position is changed on installation there can be slight deviations in the zero point for pressure ranges $P_N \leq 1 \text{ bar}$.

⁸ This directive is only valid for devices with maximum permissible overpressure > 200 bar

Wiring diagrams	
<p>2-wire-system (current)</p>	<p>3-wire-system (voltage)</p>


Pin configuration								
Electrical connections	ISO 4400	Binder 723 (5-pin)	Binder 723 (7-pin)	M12x1 / metal (4-polig)	Bayonet MIL-C-26482 (10-6)		field housing	cable colours (IEC 60757)
					2-wire	3-wire		
supply +	1	3	3	1	A	A	IN +	wh (white)
supply -	2	4	1	2	B	D	IN -	bn (brown)
signal + (only for 3-wire)	3	1	6	3	-	B	OUT +	gn (green)
shield	ground pin	5	2	4	pressure port		I	gnye (green-yellow)
Communication interface ⁹	RxD	-	-	4	-	-	-	-
	TxD	-	-	5	-	-	-	-
	GND	-	-	7	-	-	-	-

⁹ may not be transmitted directly with the PC (the suitable adapter is available as accessory)

Electrical connections (dimensions mm / in)	
standard	
ISO 4400 (IP65)	

Electrical connections (dimensions mm / in)

optional

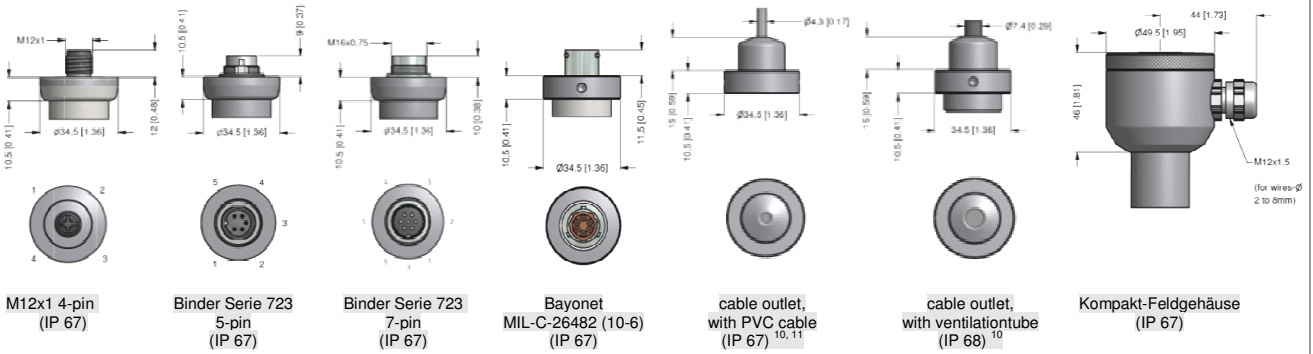

⇒ universal-Fieldhousing stainless steel 316L with cable gland M20x1,5 (ordering code 880) and other versions on request




¹⁰ different cable types and lengths available, permissible temperature depends on kind of cable
¹¹ standard: 2 m PVC cable (without ventilation tube, permissible temperature: -5 ... 70 °C)

Mechanical connection (dimensions in mm / inch)

DMP331i


DMP 333i*

**DMP 331i
with RS232**

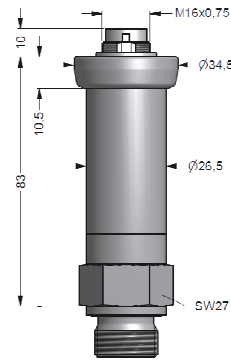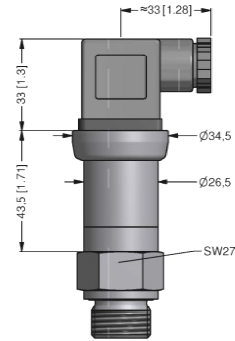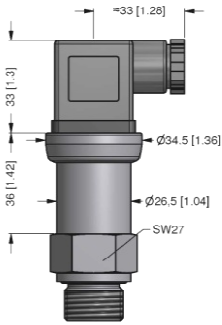

* DMP 333i: for nominal pressure $P_N > 400$ bar increases the length without IS-version by 19 mm and with IS-version by 39 mm.

pressure ports

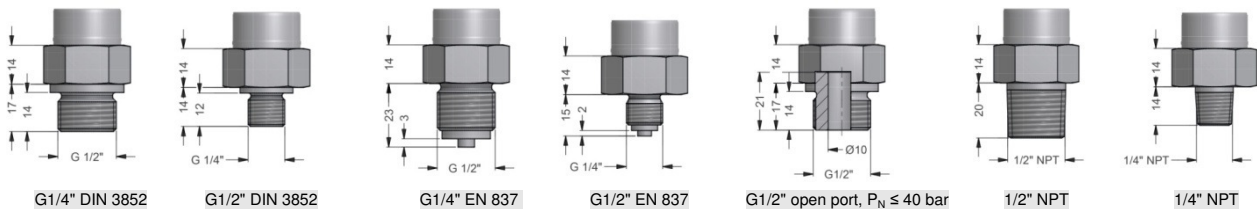

⇒ metric threads and others on request

Windows® is a registered trade mark of Microsoft Corporation

© 2017 BD|SENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

Ordering code DMP 331i/ DMP 333i

DMP 331i/ DMP 333i

□ □ □ - □ □ □ □ - □ - □ - □ □ □ - □ □ □ - □ □ □ - □ □ □

Pressure																				
For DMP 331i		gauge	1	1	0															
		absolute	1	1	1															
For DMP 333i		gauge ¹	1	3	0															
		absolute	1	3	1															
Input		[mH ₂ O]	[bar]																	
For DMP 331i²		4	0.40	4	0	0	0													
		10	1.0	1	0	0	1													
		20	2.0	2	0	0	1													
		40	4.0	4	0	0	1													
		100	10	1	0	0	2													
		200	20	2	0	0	2													
		400	40	4	0	0	2													
		600	60	6	0	0	2													
For DMP 333i²		100		1	0	0	3													
		200		2	0	0	3													
		400		4	0	0	3													
		600		6	0	0	3													
For DMP 331i		-0.40 ... 0.40		S	4	0	0													
		-1 ... 1		S	1	0	2													
		-1 ... 2		V	2	0	2													
		-1 ... 4		V	4	0	2													
		-1 ... 10		V	1	0	3													
		customer		9	9	9	9													consult
Output																				
		4 ... 20 mA / 2-wire						1												
		Intrinsic safety 4 ... 20 mA / 2-wire						E												
		0 ... 10 V / 3-wire						3												
		customer						9												consult
Accuracy (at nominal pressure)																				
		0.1 %						1												
		customer						9												consult
Electrical connection																				
		Male and female plug ISO 4400						1	0	0										
		Male plug Binder series 723 (5-pin)						2	0	0										
		Compact field housing						8	5	0										
		stainless steel 1.4404 (316L)																		
		Male and female plug						A	0	0										
		Binder series 723 (7-pin)																		
		Male plug M12x1 (4-pin) / metal						M	1	0										
		for analog output																		
		Male plug M12x1 (4-pin) / metal						M	1	3										
		for digital output																		
		Bayonet MIL-C-26482 (10-6); 2 wire						B	G	0										
		Bayonet MIL-C-26482 (10-6); 3 wire						B	G	1										
		Cable outlet with PVC cable ³						T	A	0										
		Cable outlet ⁴						T	R	0										
		customer						9	9	9										consult
Mechanical connection																				
		G1/2" DIN 3852						1	0	0										
		G1/2" EN 837						2	0	0										
		G1/4" DIN 3852						3	0	0										
		G1/4" EN 837						4	0	0										
		G1/2" DIN 3852 with ⁵						F	0	0										
		flush sensor																		
		G1/2" DIN 3852 open pressure port ⁵						H	0	0										
		1/2" NPT						N	0	0										
		1/4" NPT						N	4	0										
		customer						9	9	9										consult
Seals																				
For DMP 331i		FKM																		
		without (welded version) ^{5,6}																		
For DMP 333i		FKM																		
		NBR																		
		customer																		consult
Special version																				
		standard																		
		RS-232 interface ⁷																		
		customer																		consult

¹ measurement starts with ambient pressure
² pressure ranges ≤ 60 bar as DMP 331i; pressure ranges > 60 bar as DMP 333i
³ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C), optionally cable with ventilation tube
⁴ cable with ventilation tube (code TR0 = PVC cable), different cable types and lengths available, price without cable
⁵ only possible for DMP 331i and P_N ≤ 40 bar
⁶ welded version only with pressure ports according to EN 837
⁷ RS-232 interface only possible with el. connection Binder serie 723 (7pin)
 Software, Interface and cable for DMP 331i and DMP 333i with option RS-232 have to be order separately
 (Ordering code: CIS-G; Software appropriate for Windows® 95, 98, 2000, NT Version 4.0 or newer and XP)

Windows® is a registered trademark of Microsoft Corporation

© 2017 BD|SENSORS GmbH - The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.