

DS 4

Electronic OEM Pressure Switch Pneumatics



Applications:

- ▶ Pneumatics
- ▶ Vacuum technology

Characteristics:

- ▶ nominal pressure ranges from 0 ... 1 bar up to 0 ... 10 bar also 0 ... -1 bar
- ▶ 1 or 2 contacts
- ▶ compact design
- ▶ configurable via PC or programming device P6




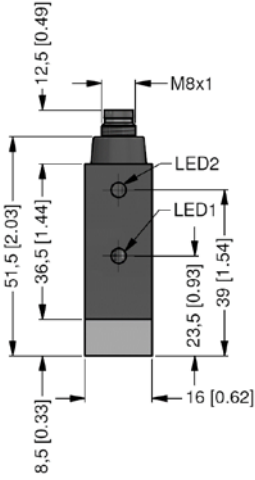
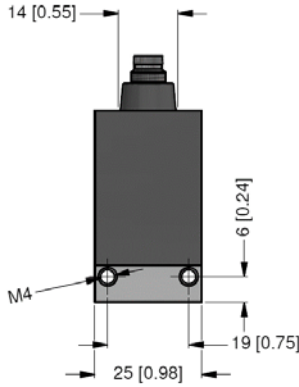
Technical Data

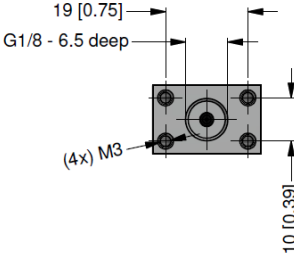
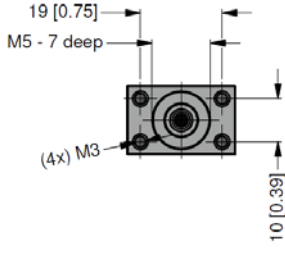
Input pressure range					
Nominal pressure gauge	[bar]	0 ... -1	1	3.5	10
Overpressure	[bar]	2	2	7	13

Supply	
Supply voltage	$V_S = 12 \dots 30 V_{DC}$
Current consumption	max. 14 mA (without contacts)
Output signal / Contact ¹	
Number	standard: 1 option: 2
Type	PNP
Switching performance	max. 300 mA, short-circuit proof
Accuracy of contacts ²	$\leq \pm 1 \% FSO$
Repeatability	$\leq \pm 0.2 \% FSO$
Status indication	SP 1: green SP 2: yellow
Switching function ³	standard: n/o option: n/c
Switching mode ³	standard: hysteresis mode option: window mode
Switch on point ³	standard: factory setting 80 % FSO others: specify on order; adjustable range 0 ... 100 % FSO
Switch off point ³	standard: factory setting 75 % FSO others: specify on order; adjustable range 0 ... 100 % FSO
Switch on / switch off delay ³	standard: off others: specify on order, adjustable range from 10 msec up to 90 sec (step 10 msec)
Switching frequency	200 Hz (without switching delay)
Switching cycles	$> 100 \times 10^6$
¹ with optional analogue output max. 1 contact possible	
² accuracy according to IEC 61298-2 – limit point adjustment (non-linearity, hysteresis, repeatability)	
³ Parameters can be programmed by customer either with the programming kit CIS680/CIS681 or with the programming device P6 (available as accessories).	

Output signal / Analogue output ¹ (optionally)		
Analogue output	1 ... 5 V / 3-wire	
Accuracy ²	$\leq \pm 2\%$ FSO	
Permissible load	$R_{\min} = 10\text{ k}\Omega$	
¹ with optional analogue output max. 1 contact possible		
² accuracy according to IEC 61298-2 – limit point adjustment (non-linearity, hysteresis, repeatability)		
Thermal effects (offset and span)		
Tolerance band	$\leq \pm 2\%$ FSO	in compensated range 0 ... 50 °C
TC, average	$\leq \pm 0.4\%$ FSO / 10 K	in compensated range 0 ... 50 °C
Permissible temperatures		
Medium	-25 ... 85 °C	
Electronics / environment	-25 ... 85 °C	
Storage	-40 ... 85 °C	
Electrical protection		
Short-circuit protection	permanent	
Reverse polarity protection	no damage, but also no function	
Electromagnetic compatibility	emission and immunity according to EN 61326	
Mechanical stability		
Vibration	20 g RMS / 10 ... 2000 Hz	according to DIN EN 60068-2-6
Shock	500 g / 1 msec half sine	according to DIN EN 60068-2-27
Materials		
Pressure port	aluminium	
Housing	PA 6.6 black	
Seal (media wetted)	NBR	
Sensor	silicon, RTV	
Media wetted parts	pressure port, seal, sensor	
Miscellaneous		
Media	compressed air, non-aggressive gases	
Weight	approx. 50 g	
Installation position	any	
Operational life	100 million load cycles	
Ingress protection	IP 54	
CE-conformity	EMC Directive: 2014/30/EU	
Wiring diagrams		
1 contact, without analogue output		
2 contacts, without analogue output		
1 contact, with analogue output		

Pin configuration				
Electrical connection	M8x1 / metal (4-pin)			
	1 contact	2 contacts	1 contact, 1 analogue output	
Supply +	1	1	1	
Supply -	3	3	3	
Signal +	-	-	2	
Contact 1	4	4	4	
Contact 2	-	2	-	
Shield	housing	housing	housing	

Dimensions (mm / in)	
	

Mechanical connections (dimensions mm / in)	
 <p>G1/8" internal thread</p>	 <p>M5 internal thread</p>

© 2025 BD|SENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

Ordering code DS 4

DS 4

□	□	□	□	□	□	□	□	□	□	□	□	□	□
---	---	---	---	---	---	---	---	---	---	---	---	---	---

Pressure		gauge	6	8	0														
Input		[bar]																	
	1.0		1	0	0	1													
	3.5		3	5	0	1													
	10		1	0	0	2													
	0 ... -1	Z	1	0	2														
	customer		9	9	9	9													consult
Number of contacts																			
	1 contact					1													
	2 contacts ¹					2													
Analogue output																			
	without analogue output					0													
	1 ... 5 V / 3-wire ¹					C													
Electrical connection																			
	M8x1 (4-pin) / metal					Q	0	0											
	customer					9	9	9											consult
Mechanical connection																			
	G1/8" internal thread					Q	0	0											
	M5 internal thread with slot for O-ring ²					R	0	0											
	customer					9	9	9											consult
Seal																			
	NBR					5													
	customer					9													consult
Setting code																			
	BD SENSORS standard ³					0	0	0											
	setting according to customer ³					9	9	9											consult
Special version																			
	standard					0	0	0											
	customer					9	9	9											consult

¹ with optional analogue output max. 1 contact possible

² suitable for flange installation

³ Parameters can be programmed by customer either with the programming kit CIS 680 / CIS 681 or with the programming device P6 (available as accessories).