

LMK 858

Separable Plastic Submersible Probe

Ceramic Sensor

accuracy according to IEC 60770:
standard: 0.35 % FSO
option: 0.25 % FSO



Nominal pressure

from 0 ... 40 cmH₂O up to 0 ... 100 mH₂O

Output signals

2-wire: 4 ... 20 mA
3-wire: 0 ... 10 V
others on request

Special characteristics

- ▶ diameter 45 mm
- ▶ cable and probe separable
- ▶ chemical resistance
- ▶ housing PVC



Optional versions

- ▶ cable protection via PVC pipe
- ▶ diaphragm 99.9 % Al₂O₃
- ▶ different kinds of cable
- ▶ different kinds of seal materials

The separable plastic submersible probe LMK 858 is designed for level measurement in most aggressive media. Usage in more viscous media as for example sludge is possible because of the semi-flush diaphragm.

In order to facilitate stock-keeping and maintenance the transmitter head is plugged to the cable assembly with a connector and can be changed easily.

Preferred areas of use are

-  Sewage
waste water treatment
water recycling
dumpsite
-  Aggressive media
level measurement in
most of acids and lyes



Input pressure range														
Nominal pressure gauge	[bar]	0.04	0.06	0.1	0.16	0.25	0.4	0.6	1	1.6	2.5	4	6	10
Level	[mH ₂ O]	0.4	0.6	1	1.6	2.5	4	6	10	16	25	40	60	100
Overpressure	[bar]	2	2	4	4	6	6	8	8	15	25	25	35	35

Output signal / Supply		
Standard	2-wire: 4 ... 20 mA / V _S = 9 ... 32 V _{DC}	option 3-wire: 0 ... 10 V / V _S = 12.5 ... 32 V _{DC}

Performance		
Accuracy	standard: option:	IEC 60770 ¹ ≤ ± 0.35 % FSO ≤ ± 0.25 % FSO
Permissible load	R _{max} = [(V _S - V _{S min}) / 0.02 A] Ω	
Influence effects	supply:	0.05 % FSO / 10 V
	load:	0.05 % FSO / kΩ
Long term stability	≤ ± 0.1 % FSO / year at reference conditions	
Turn-on time	700 msec	
Mean response time	< 200 msec	measuring rate 5/sec
Max. response time	380 msec	

¹ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)

Thermal effects (Offset and Span)	
Thermal error	≤ ± 0.1 % FSO / 10 K in compensated range 0 ... 50 °C

Permissible temperatures	
Permissible temperatures	medium: -10 ... 50 °C electronic / environment: -10 ... 50 °C storage: -10 ... 50 °C

Electrical protection ²	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Electromagnetic compatibility	emission and immunity according to EN 61326

² additional external overvoltage protection unit in terminal box KL 1 or KL 2 with atmospheric pressure reference available on request


Electrical connection	
Cable with sheath material ³	PVC (-5 ... 50 °C) grey PUR (-10 ... 50 °C) black FEP ⁴ (-10 ... 50 °C) black
Cable protection	standard: without cable protection optional: prepared for mounting of a PVC pipe with diameter 25 mm

³ cable with integrated air tube for atmospheric pressure reference

⁴ do not use freely suspended probes with an FEP cable if effects due to highly charging processes are expected

Materials (media wetted)	
Housing	PVC grey
Seals	FKM / EPDM / others on request
Diaphragm	standard: ceramics Al ₂ O ₃ 96 % option: ceramics Al ₂ O ₃ 99.9 %

Miscellaneous	
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1 μH/m
Current consumption	max. 25 mA
Weight	approx. 400 g (without cable)
Ingress protection	IP 68
CE-conformity	EMC Directive: 2014/30/EU

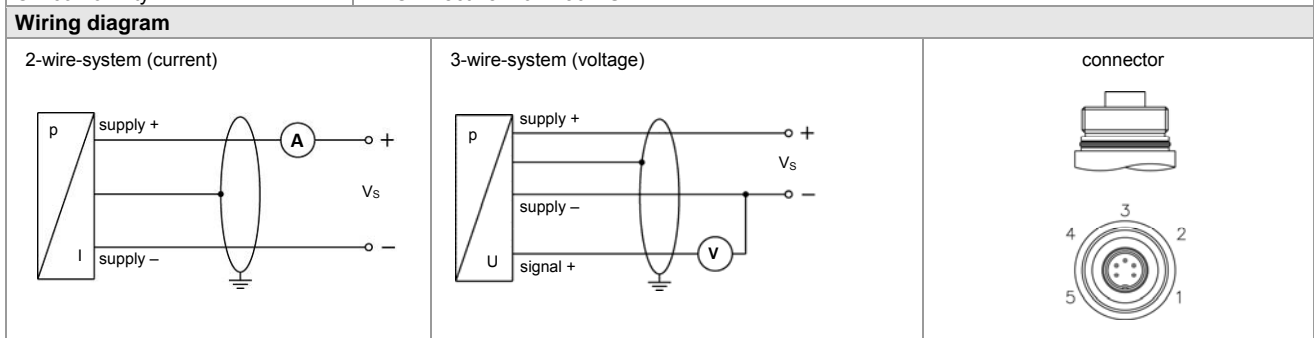

LMK 858

Plastic Probe

Technical Data

Pin configuration			
Electrical connection	Binder series 723 ⁵ (5-pin)		cable colours (IEC 60757)
	2-wire	3-wire	
Supply +	3	3	wh (white) bn (brown) gn (green)
Supply -	1	4	
Signal + (only for 3-wire)	-	1	
Shield	5	5	gnye (green-yellow)
⁵ in separated version			
Dimensions (in mm)			
	standard	separated version	special version for cable protection with PVC pipe

Accessories

Terminal clamp		
Technical Data		
Suitable for	all probes with cable \varnothing 5.5 ... 10.5 mm	
Material	standard: steel, zinc plated optionally: stainless steel 1.4301 (304)	
Weight	approx. 160 g	
Ordering type	Ordering code	
Terminal clamp, steel, zinc plated	Z100528	
Terminal clamp, stainless steel 1.4301 (304)	Z100527	

© 2018 BDSSENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

