

LMP 307i

Stainless Steel Probe

Stainless Steel Sensor

accuracy according to IEC 60770:
standard: 0.1 % FSO



Nominal pressure

from 0 ... 4 mH₂O up to 0 ... 200 mH₂O

Output signals

2-wire: 4 ... 20 mA
3-wire: 0 ... 10 V
others on request

Special characteristics

- ▶ diameter 26.5 mm
- ▶ small thermal effect
- ▶ excellent accuracy
- ▶ excellent long term stability

Optional versions

- ▶ IS-protection zone 0
- ▶ cable protection via corrugated pipe
- ▶ drinking water certificate according to DVGW and KTW
- ▶ different kinds of cables
- ▶ different kinds of seal materials

The stainless steel probe LMP 307i is designed for continuous level measurement in water and clean or lightly polluted fluids.

Basic element is a high quality stainless steel sensor with high requirements for exact measurement with excellent long term stability.

Preferred areas of use are

Water / filtrated sewage

drinking water system
ground water level measurement
rain spillway basin
pump and booster stations
level measurement in container
water treatment plants
water recycling



Fuel / Oil


fuel storage
tank farm




Input pressure range ¹							
Nominal pressure gauge	[bar]	0.40	1	2	4	10	20
Level	[mH ₂ O]	4	10	20	40	100	200
Overpressure	[bar]	2	5	10	20	40	80
Burst pressure ≥	[bar]	3	7.5	15	25	50	120
¹ On customer request we adjust the device within the turn-down-possibility by software on the required pressure range.							
Output signal / Supply							
Standard	2-wire: 4 ... 20 mA / V _S = 12 ... 36 V _{DC}						
Option Ex-protection	2-wire: 4 ... 20 mA / V _S = 14 ... 28 V _{DC}						
Options 3-wire	3-wire: 0 ... 10 V / V _S = 14 ... 36 V _{DC}						
Performance							
Accuracy ²	nominal pressure ≥ 0.1 bar: ≤ ± 0.1 % FSO nominal pressure < 0.1 bar: ≤ ± 0.2 % FSO						
Permissible load	current 2-wire: R _{max} = [(V _S - V _{S min}) / 0.02 A] Ω voltage 3-wire: R _{min} = 10 kΩ						
Influence effects	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / kΩ						
Long term stability	≤ ± 0.1 % FSO / year at reference conditions						
Response time	ca. 200 msec						
² accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)							
Thermal effects (Offset and Span)							
Tolerance band	≤ ± 0.2 % FSO			in compensated range -20 ... 80°C			
TC	≤ ± 0.02 % FSO / 10K			in compensated range -20 ... 80°C			
Permissible temperatures							
Permissible temperatures	medium: -10 ... 70 °C			storage: -25 ... 70 °C			
Electrical protection ³							
Insulation resistance	> 100 MΩ						
Reverse polarity protection	no damage, but also no function						
Electromagnetic compatibility	emission and immunity according to EN 61326						
³ additional external overvoltage protection unit in terminal box KL 1 or KL 2 with atmospheric pressure reference available on request							
Electrical connection							
Cable with sheath material ⁴	PVC	(-5 ... 70 °C)	grey				
	PUR	(-10 ... 70 °C)	black				
	FEP ⁵	(-10 ... 70 °C)	black				
	TPE-U	(-10 ... 70 °C)	blue (without/with drinking water certificate)				
⁴ cable with integrated air tube for atmospheric pressure reference							
⁵ do not use freely suspended probes with an FEP cable if effects due to highly charging processes are expected							
Materials (media wetted)							
Housing	stainless steel 1.4404 (316L)						
Seals	FKM			EPDM (without/with drinking water certificate) others on request			
Diaphragm	stainless steel 1.4435 (316L)						
Protection cap	POM-C						
Explosion protection (only for 4 ... 20 mA / 2-wire)							
Approvals DX19-LMP 307i	IBExU 10 ATEX 1068 X / IECEx IBE 12.0027X zone 0: II 1G Ex ia IIC T4 Ga zone 20: II 1D Ex ia IIIC T 85°C Da						
Safety technical maximum values	U _i = 28 V, I _i = 93 mA, P _i = 660 mW, C _i ≈ 0 nF, L _i ≈ 0 μH, the supply connections have an inner capacity of max. 27 nF to the housing						
Ambient temperature range	in zone 0: -20 ... 60 °C with p _{atm} 0.8 bar up to 1.1 bar in zone 1 or higher: -20 ... 65 °C						
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1 μH/m						
Miscellaneous							
Drinking water certificate ⁶	according to DVGW W 270 and UBA KTW (with order the indication "with drinking water certificate" is necessary)						
Current consumption	signal output current: max. 25 mA signal output voltage: max. 7 mA						
Weight	approx. 200 g (without cable)						
Ingress protection	IP 68						
CE-conformity	EMC Directive: 2014/30/EU						
ATEX Directive	2014/34/EU						
⁶ only possible with EPDM seal in combination with TPE-U cable; not possible with IS-protection (explosion protection)							

Wiring diagrams

2-wire-system (current)

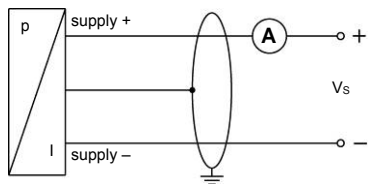


3-wire-system (current / voltage)


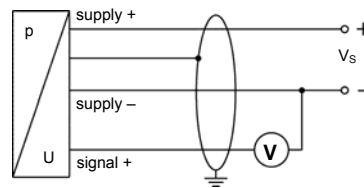



Pin configuration

Electrical connection	cable colours (IEC 60757)
Supply +	wh (white)
Supply -	bn (brown)
Signal + (only 3-wire)	gn (green)
Shield	gnye (green-yellow)

Dimensions (in mm)

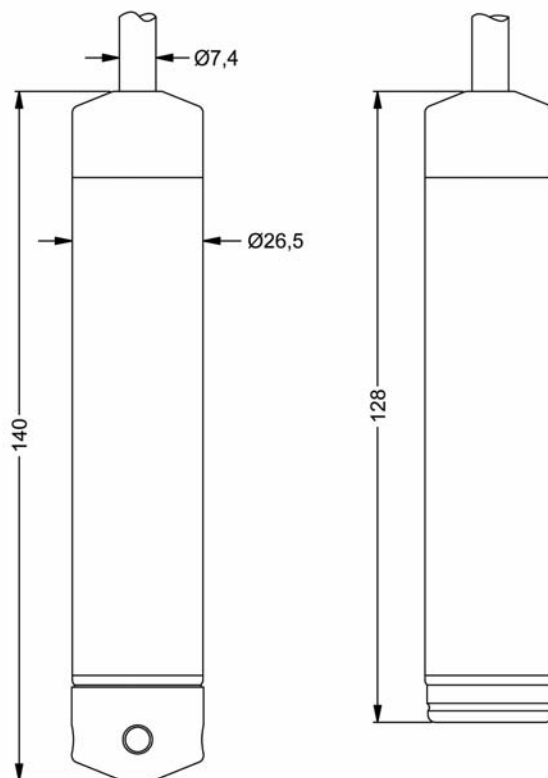

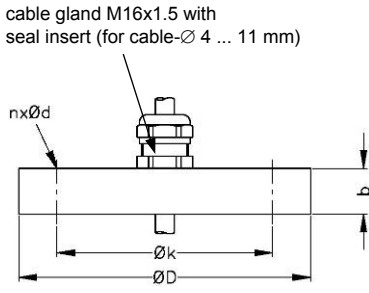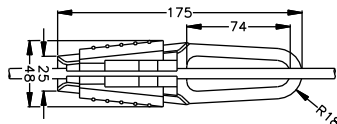Mounting flange with cable gland	
Technical data	
Suitable for	all probes
Flange material	stainless steel 1.4404 (316L)
Material of cable gland	standard: brass, nickel plated on request: stainless steel 1.4305 (303); plastic
Seal insert	material: TPE (ingress protection IP 68)
Hole pattern	according to DIN 2507
Version	Size (in mm) Weight
DN25 / PN40	D = 115, k = 85, b = 18, n = 4, d = 14 1.4 kg
DN50 / PN40	D = 165, k = 125, b = 20, n = 4, d = 18 3.2 kg
DN80 / PN16	D = 200, k = 160, b = 20, n = 8, d = 18 4.8 kg
Ordering type Ordering code	
DN25 / PN40 with cable gland brass, nickel plated ZMF2540	
DN50 / PN40 with cable gland brass, nickel plated ZMF5040	
DN80 / PN16 with cable gland brass, nickel plated ZMF8016	
Terminal clamp	
Technical data	
Suitable for	all probes with cable \varnothing 5.5 ... 10.5 mm
Material	standard: steel, zinc plated optionally: stainless steel 1.4301 (304)
Weight	approx. 160 g
Ordering type	Ordering code
Terminal clamp, steel, zinc plated	Z100528
Terminal clamp, stainless steel 1.4301 (304)	Z100527
Display program	
<p>CIT 200 Process display with LED display</p> <p>CIT 250 Process display with LED display and contacts</p> <p>CIT 300 Process display with LED display, contacts and analogue output</p> <p>CIT 350 Process display with LED display, bargraph, contacts and analogue output</p> <p>CIT 400 Process display with LED display, contacts, analogue output and Ex-approval</p> <p>CIT 600 Multichannel process display with graphics-capable LC display</p> <p>CIT 650 Multichannel process display with graphics-capable LC display and datalogger</p> <p>CIT 700 / CIT 750 Multichannel process display with graphics-capable TFT monitor, touchscreen and contacts</p> <p>PA 440 Field display with 4-digit LC display</p>	
<p>For further information please contact our sales department or visit our homepage: http://www.bdsensors.com</p>	
	
	
	

© 2018 BD|SENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

