



# LMP 808

## Detachable Plastic Probe

### Stainless Steel Sensor

accuracy according to IEC 61298-2:  
standard: 0.35 % FSO  
option: 0.25 %

#### Nominal pressure

from 0 ... 1 mH<sub>2</sub>O up to 0 ... 100 mH<sub>2</sub>O

#### Output signals

2-wire: 4 ... 20 mA  
3-wire: 0 ... 20 mA / 0 ... 10 V  
others on request

#### Special characteristics

- ▶ diameter 35 mm
- ▶ cable assembly and sensor head detachable
- ▶ excellent linearity
- ▶ small thermal effect
- ▶ integrated lightning protection and increased overvoltage protection  
8 kA gas discharge tube (8/20 µsec);  
4 kV surge I-I-I-e according to  
EN61000-4-5

#### Optional versions

- ▶ SIL 2 (Safety Integrity Level)  
according to IEC 61508 / 61511
- ▶ different kinds of cables  
and elastomers

The separable plastic immersion probe LMP 808 was developed for water applications, for level measurements in rivers and for level measurements by fuels and oils designed. The basic element is a precise stainless steel sensor.

Since the area of application is often outside a building, great emphasis was placed on overvoltage / lightning protection.

To simplify warehousing and Maintenance, the probe head can be separated from the cable part and, if necessary, can be done without time-consuming assembly work can be replaced.

#### Preferred areas of use are


- Water / filtrated sewage
- ground water level measurement
- rain spillway basins
- drinking water systems
- water treatment plants
- Fuel and oil
- fuel storage
- tank farms
- biogas plants
- process water recycling




Input pressure range												
Nominal pressure gauge	[bar]	0.1	0.16	0.25	0.4	0.6	1	1.6	2.5	4	6	10
Level	[mH <sub>2</sub> O]	1	1.6	2.5	4	6	10	16	25	40	60	100
Overpressure	[bar]	0.5	1	1	2	5	5	10	10	20	40	40
Burst pressure ≥	[bar]	1.5	1.5	1.5	3	7.5	7.5	15	15	25	50	50
Max. ambient pressure (housing): 20 bar												
Output signal / Supply												
Standard	2-wire: 4 ... 20 mA / V <sub>S</sub> = 8 ... 32 V <sub>DC</sub>						SIL-version: V <sub>S</sub> = 14 ... 28 V <sub>DC</sub>					
Options 3-wire	3-wire: 0 ... 20 mA / V <sub>S</sub> = 14 ... 30 V <sub>DC</sub> 0 ... 10 V / V <sub>S</sub> = 14 ... 30 V <sub>DC</sub>											
Performance												
Accuracy	standard:		nominal pressure < 0.4 bar:					≤ ± 0.5 % FSO				
			nominal pressure ≥ 0.4 bar:					≤ ± 0.35 % FSO				
	option:		nominal pressure ≥ 0.4 bar:					≤ ± 0.25 % FSO				
Permissible load	current 2-wire:		R <sub>max</sub> = [(V <sub>S</sub> - V <sub>S min</sub> ) / 0.02 A] Ω									
	current 3-wire:		R <sub>max</sub> = 500 Ω									
	voltage 3-wire:		R <sub>min</sub> = 10 kΩ									
Influence effects	supply: 0.05 % FSO / 10 V						load: 0.05 % FSO / kΩ					
Long term stability	≤ ± 0.1 % FSO / year at reference conditions											
Response time	< 10 msec											
<sup>1</sup> accuracy according to IEC 61298-2 – limit point adjustment (non-linearity, hysteresis, repeatability)												
Thermal effects (offset and span)												
Nominal pressure P <sub>N</sub>	[bar]	< 0.40						≥ 0.40				
Tolerance band	[% FSO]	≤ ± 1						≤ ± 0.75				
In compensated range	[°C]	0 ... 50										
Permissible temperatures												
Permissible temperatures	medium / electronics / environment / storage: 0 ... 60 °C											
Electrical protection <sup>2</sup>												
Short-circuit protection	permanent											
Reverse polarity protection	no damage, but also no function											
Electromagnetic compatibility	emission and immunity according to EN 61326											
<sup>2</sup> additional external overvoltage protection unit in terminal box KL 1 or KL 2 with atmospheric pressure reference available on request												
Overvoltage / Lightning protection (only 4 ... 20 mA / 2-wire without SIL2)												
Series resistance	9.4 Ω for each positive and negative wire											
Max. leakage current	8 kA (8/20 µsec)											
Overload	4 kV (line-line and line-earth) according to EN 61000-4-5											
Max. rated current	30 mA											
Electrical connection												
Cable with sheath material <sup>3</sup>	PVC (-5 ... 70 °C) grey Ø 7.4 mm PUR (-25 ... 70 °C) black Ø 7.4 mm FEP <sup>4</sup> (-25 ... 70 °C) black Ø 7.4 mm											
Cable capacitance	signal line/shield also signal line/signal line: 160 pF/m											
Cable inductance	signal line/shield also signal line/signal line: 1 µH/m											
Bending radius	static installation: 10-fold cable diameter dynamic application: 20-fold cable diameter											
<sup>3</sup> shielded cable with integrated air tube for atmospheric pressure reference												
<sup>4</sup> do not use freely suspended probes with an FEP cable if effects due to highly charging processes are expected												
Materials (media wetted)												
Housing	PP-HT											
Seals	FKM, EPDM											
Diaphragm	stainless steel 1.4435 (316L)											
Protection cap	POM-C											
Cable sheath	PVC, PUR, FEP, others on request											
Miscellaneous												
Option cable protection (on request)	prepared for mounting with PP-HT pipe Ø 25 mm; available as compact product (standard: pipe with a total length up to 2 m possible)											
Option SIL 2 application <sup>5</sup>	according to IEC 61508 / IEC 61511											
Current consumption	signal output current: max. 25 mA signal output voltage: max. 7 mA											
Weight	approx. 400 g (without cable)											
Ingress protection	IP 68											
CE-conformity	EMC Directive: 2014/30/EU											
<sup>5</sup> only for 4...20 mA / 2-wire												

### Wiring diagrams

2-wire-system (current)



3-wire-system (current / voltage)


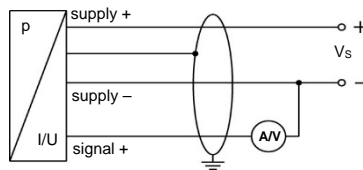


### Pin configuration


Electrical connection	M12x1 (4-pin) <sup>6</sup>	
	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p><b>A-A</b></p> </div> <div style="text-align: center;"> <p><b>B-B</b></p> </div> </div>	
Supply +	3	WH (white)
Supply -	4	BN (brown)
Signal + (only for 3-wire)	1	GN (green)
Shield	2	GNYE (green-yellow)

<sup>6</sup> if detached

### Dimensions (mm / in)

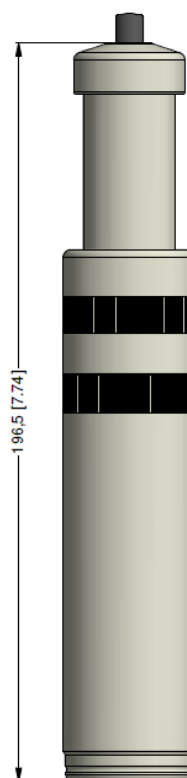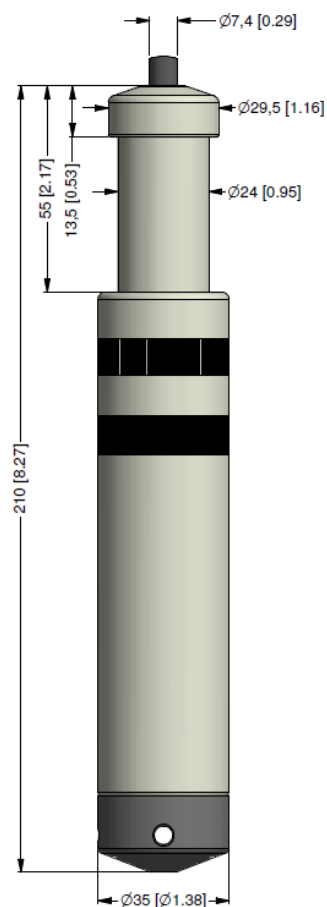

protection cap  
removable

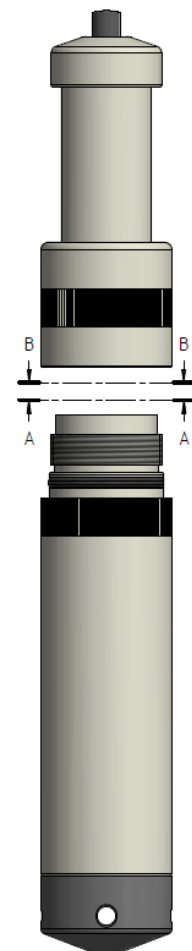

sensor head  
and cable detached

© 2025 BDSSENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

Ordering code LMP 808

LMP 808

□	□	□	-	□	□	□	□	-	□	-	□	-	□	-	□	-	□	□	□	-	□	□	□
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Pressure					
		in bar	4	1	0
		in mH <sub>2</sub> O	4	1	1
Input	[mH <sub>2</sub> O]	[bar]			
	1.0	0.10	1	0	0
	1.6	0.16	1	6	0
	2.5	0.25	2	5	0
	4.0	0.40	4	0	0
	6.0	0.60	6	0	0
	10	1.0	1	0	1
	16	1.6	1	6	1
	25	2.5	2	5	1
	40	4.0	4	0	1
	60	6.0	6	0	1
	100	10	1	0	2
	customer		9	9	9
Housing					
	PP-HT	R			
	customer	9			
Diaphragm					
	stainless steel 1.4435 (316L)	1			
	customer	9			
Output					
	4 ... 20 mA / 2-wire	1			
	0 ... 20 mA / 3-wire	2			
	0 ... 10 V / 3-wire	3			
SIL2	4 ... 20 mA / 2-wire	1S			
	customer	9			
Seals					
	FKM	1			
	EPDM	3			
	customer	9			
Electrical connection					
	PVC-cable (grey, Ø 7.4 mm) <sup>1</sup>	1			
	PUR-cable (black, Ø 7.4 mm) <sup>1</sup>	2			
	FEP-cable (black, Ø 7.4 mm) <sup>1</sup>	3			
	customer	9			
Accuracy					
standard for p <sub>N</sub> ≥ 0.4 bar	0.35 % FSO	3			
standard for p <sub>N</sub> < 0.4 bar	0.5 % FSO	5			
option for p <sub>N</sub> ≥ 0.4 bar	0.25 % FSO	2			
	customer	9			
Cable length					
	in m	9	9	9	
Special version					
	standard	0	0	0	
	prepared for pipe mounting <sup>2</sup>	1	0	6	
	customer	9	9	9	

<sup>1</sup> cable with integrated ventilation tube for atmospheric pressure reference

<sup>2</sup> pipe is not part of the supply