



LV 3

Charge Amplifier for Piezoelectric Pressure Sensors

Special characteristics

- Digital charge amplifier for piezoelectric sensors
- Measuring range freely selectable
- Signal output ± 10V
- Ethernet system interface
- Compact, robust design

((

Technical Data		
Charge inputs		1
Measuring range	[pC]	± 50 ± 600 000
Calibrated measuring ranges	[% F _{nom}]	100
Signal output, analogue		
Output voltage	[V]	-10 + 10
Output voltage limiting	[V]	± 11.5
Max. output current, short-circuit resistant	[mA]	10
Output resistance	[Ω]	<5
Interference suppression		
between input and output		> 60
(GND) (0 1000 Hz)	[dB]	
Output interference signal		
(0.1 Hz1 MHz); peak-to-peak;		< 30
over the full measuring range $\pm50\ldots\pm600000$ pC		< 30
up to 30 kHz filter frequency	[mV]	
Time from switch-on to stable output values	[ms]	375
Measurement accuracy		
Accuracy class (at 25 ℃)	[%]	< ± 0.5
Repeatability (at 25 ℃)	[%FS]	< ± 0.05
Reset/Measure (operate) step	[pC]	< ± 2 (typ. < 1)
Drift (at 20℃)	[pC/s]	< ± 0.05
Frequency response of the analogue	signal o	putput
Bandwidth (–3dB)		
measuring range 50 pC up to 32.000 pC	[kHz]	30
measuring range 32.000 pC up to 40.000 pC	[kHz]	24
measuring range 40.000 pC up to 60.000 pC	[kHz]	16
measuring range 60.000 pC up to 80.000 pC	[kHz]	12
measuring range 80.000 pC up to 100.000 pC	[kHz]	9.6
measuring range 100.000 pC up to 120.000 pC	[kHz]	8
measuring range 120.000 pC up to 180.000 pC	[kHz]	5.3 3.8
measuring range 180.000 pC up to 250.000 pC measuring range 250.000 pC up to 400.000 pC	[kHz] [kHz]	2.4
measuring range 250.000 pC up to 400.000 pC measuring range 400.000 pC up to 600.000 pC	[kHz]	1.6
Low-pass filter, up to 20 kHz selectable	[Hz]	1 20000; 30000
Filter characteristics	[, ,_]	Bessel, 5 th order
	[∐-1	
High-pass filter, selectable	[Hz]	0.15; 1.5; Off


BD SENSORS GmbH BD-Sensors-Straße 1 D - 95199 Thierstein



Offset		
Output voltage offset	[V]	± 10
Resolution	[mV]	10
Signal output, digital	[]	
Resolution	[Bit]	12
Accuracy	[%FS]	<±1
Sampling rate for peak value acqu		10
Control signals (electrically		
Input voltage range		
High	[V]	12 30
Low	[v]	05
Input current	[mA]	4 (at 24 V)
LED displays		
IP address not configured		Flashing green-blue
Connection via Ethernet		Constant blue
Measuring		Constant green
Reset		Constant red
Overload		Flashing red-blue
SensorTeach function in the range		Flashing yellow, 1 Hz
SensorTeach function in the range	ot 6000 pC	Flashing yellow, 2 Hz
Ready for firmware update		Flashing white, 2 Hz
Bootloader mode		Flashing red, 1 Hz
Connections		
System input/output		M12 plug, pin-compatible with CMA amplifier, 8 pins
Ethernet		M12 socket, 4 pins, with protective cap
Digital input/output		M12 socket, 5 pins, with protective cap
Sensor input		BNC socket
Ethernet communication int		700
		smitting measured values at max. 1 kHz transmission rate
Transmission protocol Transfer rate, max	[Mbit/s] [Mbit/s]	TCP/IP, can be networked per IEEE802 10
Topology (twisted pairs)	[IVIDIUS]	2
Connecting socket		M12, socket with protective cap
Cable type		UTP category 5 or shielded twisted pair (STP)
Digital control signals		On category on silienced twisted pair (on)
System input/output		Voltage supply; Reset/Measure; SensorTeach; Analog output signal
Ethernet input		PC/PLC connection, measured-value streaming
Digital input		F O/F LO connection, measured-value streaming
Number		1
Response time	[ms]	0.1
	[1115]	0.1
Active input level selectable	[V]	
Active input level selectable (High/Low)	[V]	0 or 24
Active input level selectable (High/Low) Input voltage range	[V]	0 or 24 030
(High/Low)		
(High/Low) Input voltage range		
(High/Low) Input voltage range Switching voltages	[V]	030
(High/Low) Input voltage range Switching voltages Logic high level	[V]	030 1230
(High/Low) Input voltage range Switching voltages Logic high level Logic low level Input current at 24 V, typ Reserve polarity protection	[V] [V] [V]	030 1230 05
(High/Low) Input voltage range Switching voltages Logic high level Logic low level Input current at 24 V, typ Reserve polarity protection Electrical isolation from	[V] [V] [V] [mA]	030 1230 05 4 -300
(High/Low) Input voltage range Switching voltages Logic high level Logic low level Input current at 24 V, typ Reserve polarity protection Electrical isolation from supply and output Isolation voltage,	[V] [V] [MA] [V]	030 1230 05 4
(High/Low) Input voltage range Switching voltages Logic high level Logic low level Input current at 24 V, typ Reserve polarity protection Electrical isolation from supply and output Isolation voltage, functional, typ.	[V] [V] [V] [mA]	030 1230 05 4 -300
(High/Low) Input voltage range Switching voltages Logic high level Logic low level Input current at 24 V, typ Reserve polarity protection Electrical isolation from supply and output Isolation voltage,	[V] [V] [MA] [V]	030 1230 05 4 -300
(High/Low) Input voltage range Switching voltages Logic high level Logic low level Input current at 24 V, typ Reserve polarity protection Electrical isolation from supply and output Isolation voltage, functional, typ. Latency periods of the	[V] [V] [MA] [V]	030 1230 05 4 -300
(High/Low) Input voltage range Switching voltages Logic high level Logic low level Input current at 24 V, typ Reserve polarity protection Electrical isolation from supply and output Isolation voltage, functional, typ. Latency periods of the electronic digital input.	[V] [V] [MA] [V]	030 1230 05 4 -300
(High/Low) Input voltage range Switching voltages Logic high level Logic low level Input current at 24 V, typ Reserve polarity protection Electrical isolation from supply and output Isolation voltage, functional, typ. Latency periods of the electronic digital input. Digital output Number Switching actions, any combination in	[V] [V] [MA] [V] [VDC]	030 1230 05 4 -300 100 2
(High/Low) Input voltage range Switching voltages Logic high level Logic low level Input current at 24 V, typ Reserve polarity protection Electrical isolation from supply and output Isolation voltage, functional, typ. Latency periods of the electronic digital input. Digital output Number Switching actions, any combination is selectable for each output	[V] [V] [MA] [V] [Vbc] [ms]	030 1230 05 4 -300 100 2 Limit value switch 1 or 2, overload, manual, system failure, parameter changeover
(High/Low) Input voltage range Switching voltages Logic high level Logic low level Input current at 24 V, typ Reserve polarity protection Electrical isolation from supply and output Isolation voltage, functional, typ. Latency periods of the electronic digital input. Digital output Number Switching actions, any combination is selectable for each output Response time	[V] [V] [MA] [V] [VDC]	030 1230 05 4 -300 100 2 Limit value switch 1 or 2, overload, manual, system failure, parameter changeover 0.1
(High/Low) Input voltage range Switching voltages Logic high level Logic low level Input current at 24 V, typ Reserve polarity protection Electrical isolation from supply and output Isolation voltage, functional, typ. Latency periods of the electronic digital input. Digital output Number Switching actions, any combination is selectable for each output Response time Active voltage level selectable	[V] [V] [MA] [V] [Vbc] [ms]	030 1230 05 4 -300 100 2 Limit value switch 1 or 2, overload, manual, system failure, parameter changeover
(High/Low) Input voltage range Switching voltages Logic high level Logic low level Input current at 24 V, typ Reserve polarity protection Electrical isolation from supply and output Isolation voltage, functional, typ. Latency periods of the electronic digital input. Digital output Number Switching actions, any combination is selectable for each output Response time Active voltage level selectable for each output (High/Low)	[V] [V] [MA] [V] [Vbc] [ms]	030 1230 05 4 -300 100 2 Limit value switch 1 or 2, overload, manual, system failure, parameter changeover 0.1 0 or 24
(High/Low) Input voltage range Switching voltages Logic high level Logic low level Input current at 24 V, typ Reserve polarity protection Electrical isolation from supply and output Isolation voltage, functional, typ. Latency periods of the electronic digital input. Digital output Number Switching actions, any combination is selectable for each output Response time Active voltage level selectable	[V] [V] [MA] [VDc] [ms] Individually [ms]	030 1230 05 4 -300 100 2 Limit value switch 1 or 2, overload, manual, system failure, parameter changeover 0.1
(High/Low) Input voltage range Switching voltages Logic high level Logic low level Input current at 24 V, typ Reserve polarity protection Electrical isolation from supply and output Isolation voltage, functional, typ. Latency periods of the electronic digital input. Digital output Number Switching actions, any combination is selectable for each output (High/Low) Output voltage Output voltage	[V] [V] [MA] [V] [VDC] [ms] Individually [ms]	030 1230 05 4 -300 100 2 Limit value switch 1 or 2, overload, manual, system failure, parameter changeover 0.1 0 or 24
(High/Low) Input voltage range Switching voltages Logic high level Logic low level Input current at 24 V, typ Reserve polarity protection Electrical isolation from supply and output Isolation voltage, functional, typ. Latency periods of the electronic digital input. Digital output Number Switching actions, any combination is selectable for each output Response time Active voltage level selectable for each output (High/Low) Output voltage (equal to supply voltage), nom. Voltage drop with load, max. Output current at operating	[V] [V] [MA] [V] [MS] [Ms] [Ms] [V] [Ms] [V] [V] [V]	030 1230 05 4 -300 100 2 Limit value switch 1 or 2, overload, manual, system failure, parameter changeover 0.1 0 or 24 24 1
(High/Low) Input voltage range Switching voltages Logic high level Logic low level Input current at 24 V, typ Reserve polarity protection Electrical isolation from supply and output Isolation voltage, functional, typ. Latency periods of the electronic digital input. Digital output Number Switching actions, any combination is selectable for each output Response time Active voltage level selectable for each output (High/Low) Output voltage (equal to supply voltage), nom. Voltage drop with load, max. Output current at operating temperature	[V] [V] [MA] [V] [MS] [MS] [V] [MS]	030 1230 05 4 -300 100 2 Limit value switch 1 or 2, overload, manual, system failure, parameter changeover 0.1 0 or 24 24 1 350
(High/Low) Input voltage range Switching voltages Logic high level Logic low level Input current at 24 V, typ Reserve polarity protection Electrical isolation from supply and output Isolation voltage, functional, typ. Latency periods of the electronic digital input. Digital output Number Switching actions, any combination is selectable for each output Response time Active voltage level selectable for each output (High/Low) Output voltage (equal to supply voltage), nom. Voltage drop with load, max. Output current at operating temperature Short-circuit current, typ.	[V] [V] [MA] [V] [MS] [Ms] [Ms] [V] [Ms] [V] [V] [V]	030 1230 05 4 -300 100 2 Limit value switch 1 or 2, overload, manual, system failure, parameter changeover 0.1 0 or 24 24 1 350 0.7
(High/Low) Input voltage range Switching voltages Logic high level Logic low level Input current at 24 V, typ Reserve polarity protection Electrical isolation from supply and output Isolation voltage, functional, typ. Latency periods of the electronic digital input. Digital output Number Switching actions, any combination is selectable for each output Response time Active voltage level selectable for each output (High/Low) Output voltage (equal to supply voltage), nom. Voltage drop with load, max. Output current at operating temperature Short-circuit current, typ.	[V] [V] [MA] [V] [MS] [MS] [V] [MS]	030 1230 05 4 -300 100 2 Limit value switch 1 or 2, overload, manual, system failure, parameter changeover 0.1 0 or 24 24 1 350
(High/Low) Input voltage range Switching voltages Logic high level Logic low level Input current at 24 V, typ Reserve polarity protection Electrical isolation from supply and output Isolation voltage, functional, typ. Latency periods of the electronic digital input. Digital output Number Switching actions, any combination is selectable for each output Response time Active voltage level selectable for each output (High/Low) Output voltage (equal to supply voltage), nom. Voltage drop with load, max. Output current at operating temperature Short-circuit current, typ. Short-circuit period Electrical isolation from	[V] [V] [MA] [V] [MS] [MS] [V] [MS]	030 1230 05 4 -300 100 2 Limit value switch 1 or 2, overload, manual, system failure, parameter changeover 0.1 0 or 24 24 1 350 0.7 Unlimited
(High/Low) Input voltage range Switching voltages Logic high level Logic low level Input current at 24 V, typ Reserve polarity protection Electrical isolation from supply and output Isolation voltage, functional, typ. Latency periods of the electronic digital input. Digital output Number Switching actions, any combination is selectable for each output Response time Active voltage level selectable for each output (High/Low) Output voltage (equal to supply voltage), nom. Voltage drop with load, max. Output current at operating temperature Short-circuit current, typ.	[V] [V] [MA] [V] [MS] [MS] [V] [MS]	030 1230 05 4 -300 100 2 Limit value switch 1 or 2, overload, manual, system failure, parameter changeover 0.1 0 or 24 24 1 350 0.7
(High/Low) Input voltage range Switching voltages Logic high level Logic low level Input current at 24 V, typ Reserve polarity protection Electrical isolation from supply and output Isolation voltage, functional, typ. Latency periods of the electronic digital input. Digital output Number Switching actions, any combination is selectable for each output Response time Active voltage level selectable for each output (High/Low) Output voltage (equal to supply voltage), nom. Voltage drop with load, max. Output current at operating temperature Short-circuit current, typ. Short-circuit solation from supply and bus potential isolation,	[V] [V] [MA] [V] [MS] Individually [ms] [V] [V] [V] [V] [V] [MA] [A]	030 1230 05 4 -300 100 2 Limit value switch 1 or 2, overload, manual, system failure, parameter changeover 0.1 0 or 24 24 1 350 0.7 Unlimited



General data								
Supply voltage				24 (1830)				
Overvoltage and reverse po					(1000)			
Isolation voltage, functio typ.	nai, [V _{DC}]			100				
Supply current (24 V) [mA]			120					
Vibration resistance	Vibration resistance			100				
202000 Hz; Duration 16 min; Cycle 2 min. [m/s²]								
Impact; Duration 1 ms Nominal (rated) tempera	[m/s²]			2000				
range (non-condensing)	[°C]				060			
Operating temperature			-40+80					
(non-condensing)		-40700						
Relative humidity (maxi (non-condensing)	mum) [%]			93, a	at +40C° ± 2C°			
Dimension (L x W x H)				11	15 x 64 x 35			
Weight	[g]				350			
Housing material				Die-c	cast aluminium			
Degree of protection, wi with protective caps	ith connected cable or				IP60			
EMC conformance								
According to EN61326- EN61326-2-3: 2007	1: 2007,			In an industrial environment				
Pin assignment								
		Co	onnector plug,	system input/	output			
Pin No	Signal name	Description		Value	Colour code KAB 168			
1	ground supply	-		-	wh (white)			
2	not assigned	not assigned		-	bn (brown)			
3	reset	act	active high		gn (green)	00 10		
4	not assigned	not	assigned	-	ye (yellow)	2 8 70 0 3 0 70 0 5 60		
5	output +	out	out signal	± 10 V	gy (grey)			
6	output -	output s	signal ground	-	pk (pink)			
7	not assigned	not	assigned	-	bl (blue)			
8	voltage supply	voltage supply between		+18 +30V				
		Pili		nnecting sock	et			
	Pin no.			Signal r				
1			TX+			3 4		
2			RX +					
3			TX -					
	4	RX -						
		Conr	ector plug, di	gital input / out	tput			
Pin no. Signal		ame	Descri	ption	Value			
1	VCC	;	input or	output	VCC / 350 mA			
2 digital d		out	ut supply for o		+18 +30 V			
3 digital d		ut digital ou		utput 2	VCC / 350 mA			
4 digital in		in	digital input 1		+12 +30 V			
5 ground supply			-		-			

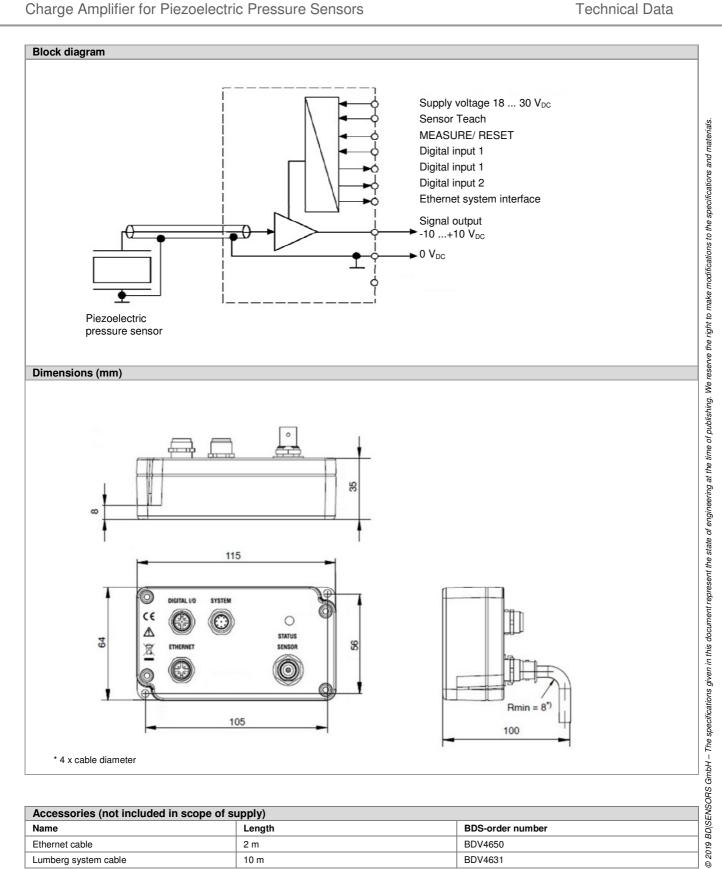

Accessories (not included in scope of supply)					
Name	Length	BDS-order number			
Ethernet cable	2 m	BDV4650			
Lumberg system cable	10 m	BDV4631			

Tel

Fax